
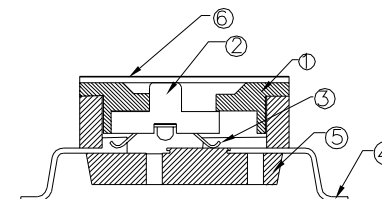
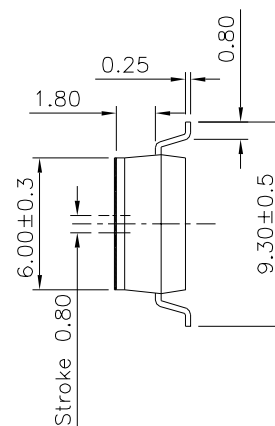
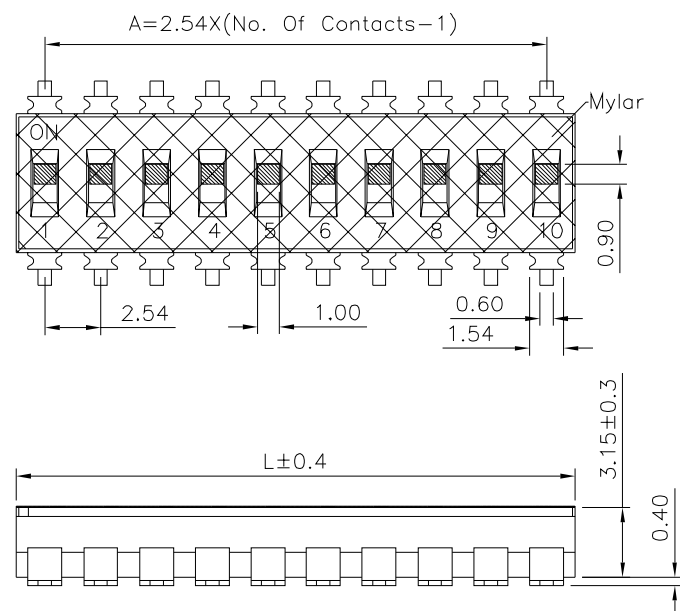


SPECIFICATION

Rating:DC 24V 25mA
Contact Resistance:100 Milliohms Max.
Operating Force:1000gf Max.
Durability:3000 Cycles
RoHS Compliant

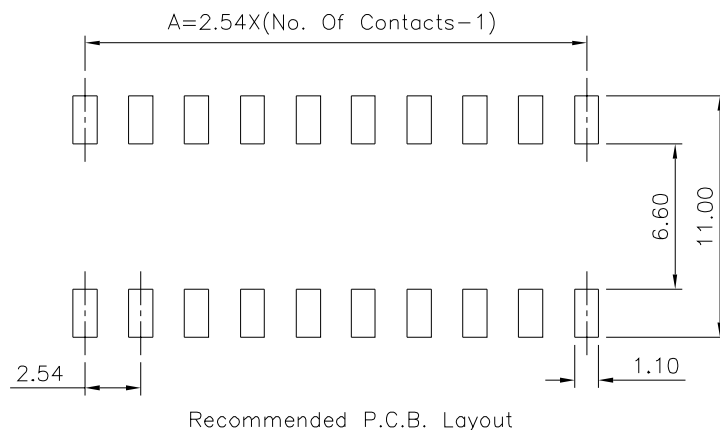

Item	Name	Material	Remark
①	Cover	PPS	Black
②	Autuator	PA6T	White
③	Contact	Phosphor Bronze	Gold Plated Over Nickel
④	Terminal	Brass	Gold Plated Over Nickel
⑤	Base	PPS	Black
⑥	Tape	Kapton	

Schematic	Pin	L	A
1	1	2.54	2.54
2	2	5.08	2.54
3	3	7.62	5.08
4	4	10.16	7.62
5	5	12.70	10.16
6	6	15.24	12.70
7	7	17.78	15.24
8	8	20.32	17.78
9	9	22.86	20.32
10	10	25.40	22.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22651

APPROVED BY
MEI

CHECKED BY
HZF

DRAWING BY
LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.30


SCALE

NONE

REV.

A0

UNIT
mm



△ A0
NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

01/18/2022

DATE