

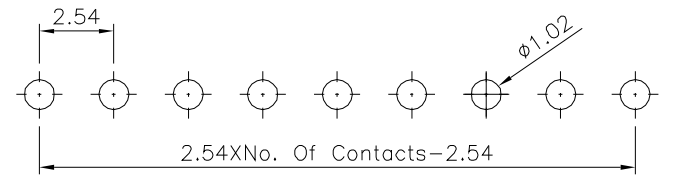



SPECIFICATION

Current Rating:3A
 Withstand Voltage:AC 1000V Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated 10u"Over All,Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

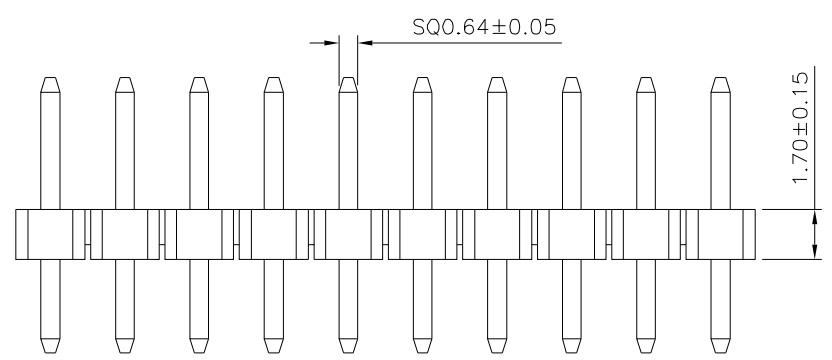

Recommended P.C.B. Layout
 Tolerance:±0.05(Top View)

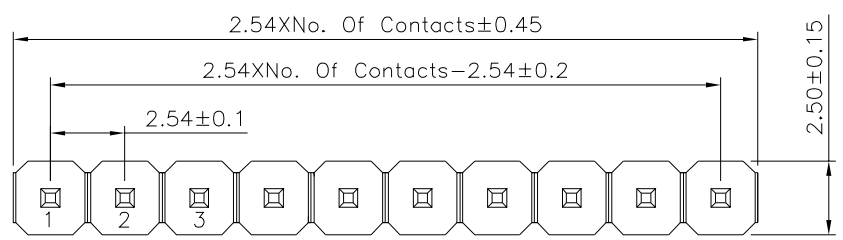

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2" X. ±0.20 X.* ±1.5" .XX ±0.15 .XX* ±1" .XXX ±0.10 .XXX* ±0.5"
22659		MEI		
		CHECKED BY	HZF	
		DRAWING BY	LSM	
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	04/18/2024