

SPECIFICATION

Current Rating:3 Amps

Withstand Voltage:500V AC

Contact Resistance: 20 Milliohms Max.




Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact:Brass,Gold Flash Over Nickel

Insulator:PA6T(UL94V-0),Black

RoHS Compliant

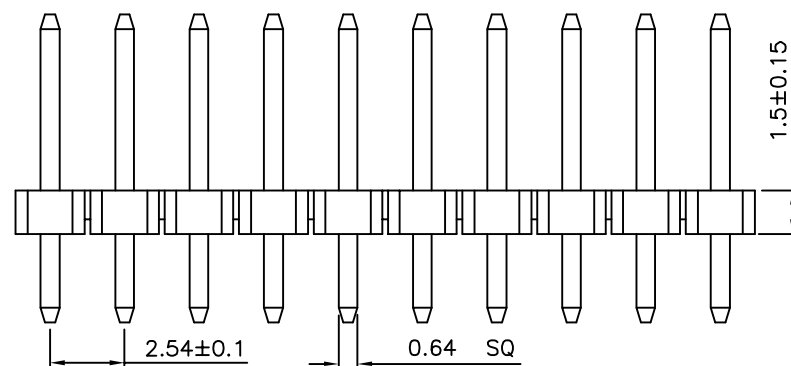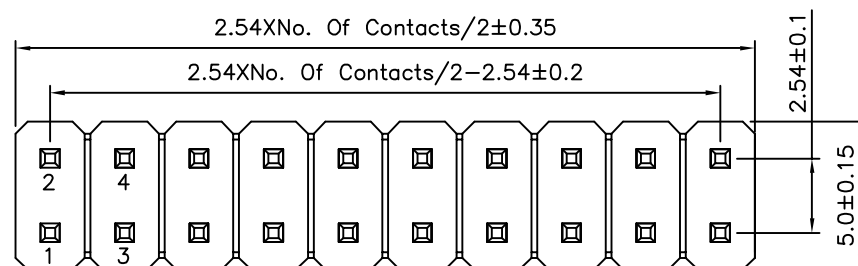

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22669

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

	REV.
--	------

AO

UNLESS OTHERWISE SPECIFIED	
-------------------------------	--

TOLERANCES ARE

X. ± 0.25	X* $\pm 2^\circ$
Y ± 0.25	Y* $\pm 1.5^\circ$

	$.X \pm 0.20$	$.X^* \pm 1.5^*$
	$YX \pm 0.15$	$YX^* \pm 1.1^*$

.XX ±0.15	.XX* ±1°
YYY ±0.10	YYY* ±0.5°

.XXX :
UNIT



5'		AO
----	---	----

AO

NEW RELEASE

RELEASE

HZF

09/17/2015

NO.	REV.
-----	------

REVISIONS

CHK

	DATE
--	------