
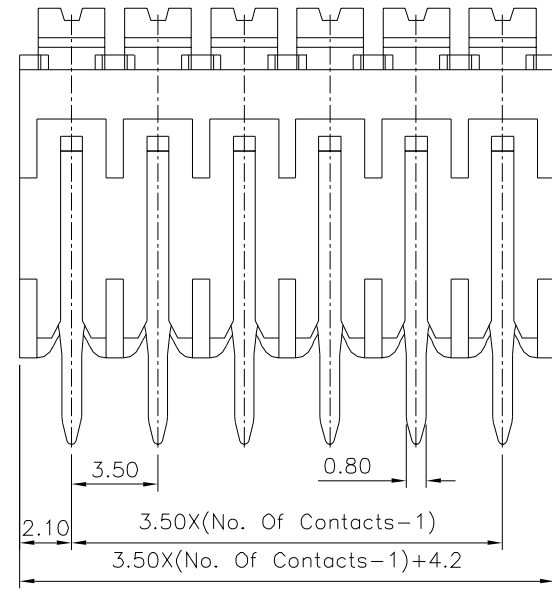
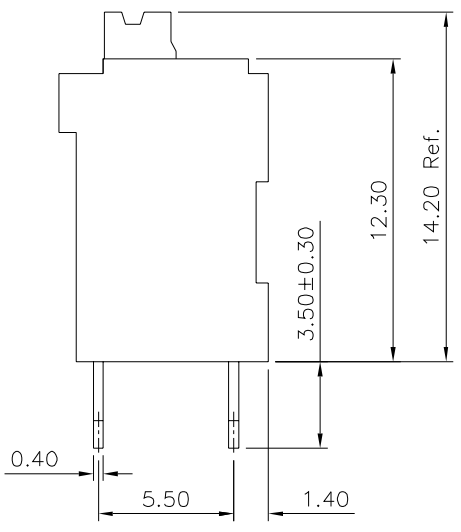
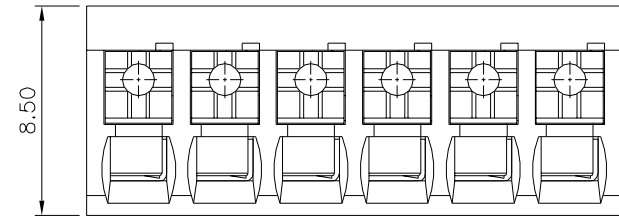


SPECIFICATION
 Current Rating:10A
 Voltage Rating:300V
 Withstanding Voltage:1600V/Minute
 Wire Range Solid/Stranded:24~16AWG
 Pitch/Poles:3.5mm/2~24P
 Stripping Length:7~8mm
 Operation Temperature:-40°C~+130°C
 Housing:LCP(UL94V-0),Black
 Contact:Copper Alloy,Tin Plated
 RoHS Compliant

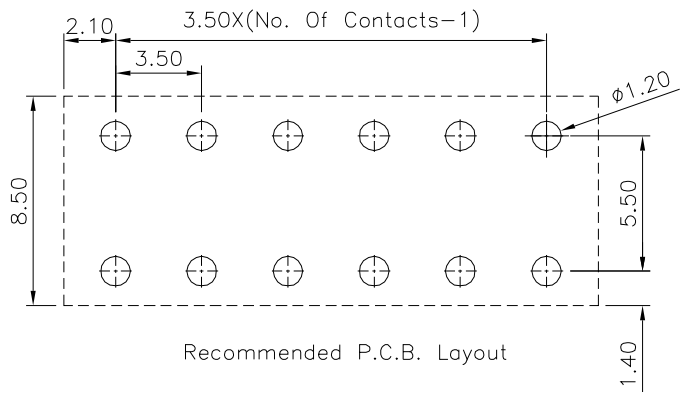

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0<L≤6 ±0.20 6<L≤10 ±0.30 10<L≤30 ±0.50 30<L≤60 ±0.70 60<L≤100 ±1.00 100<L≤180 ±1.30 180<L ±1.60
22740		MEI		
		HZF		
		DRAWING BY		
		LSM		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/01/2024