

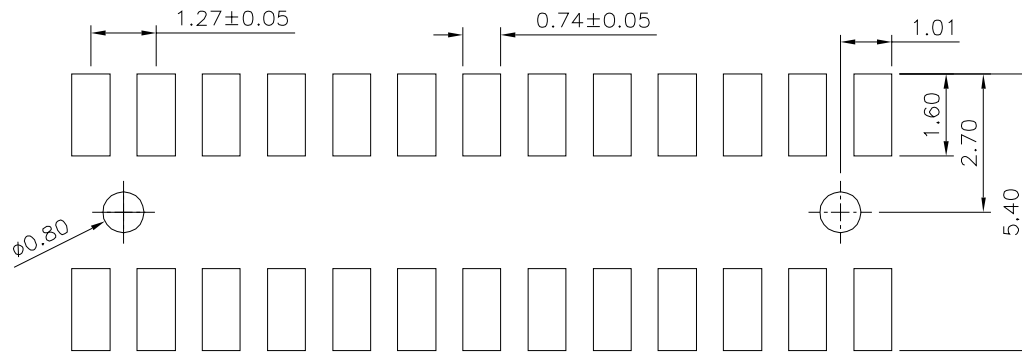



SPECIFICATION

Current Rating:1A
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

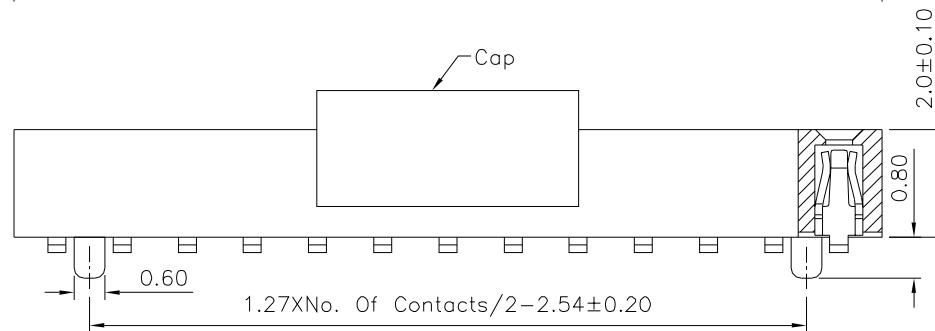

Recommended P.C.B. Layout
 (PCB Board Tolerance±0.05)

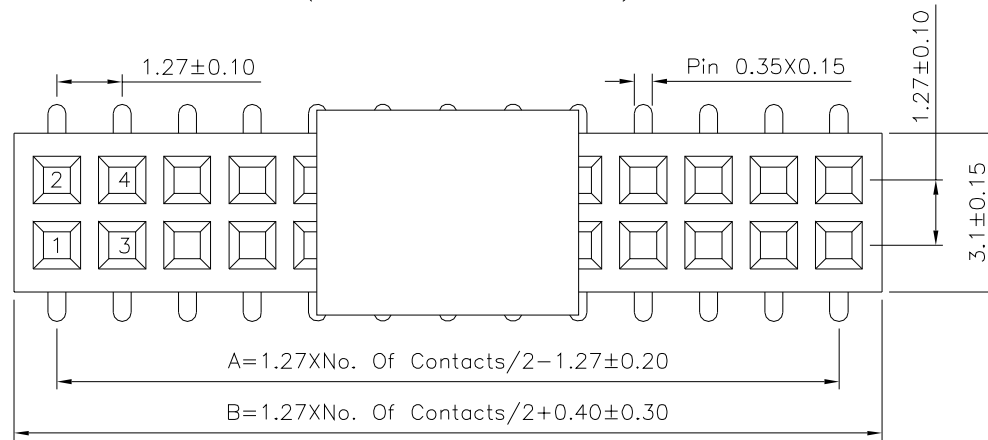

Pin	A	B	Pin	A	B
06	2.54	4.21	54	33.02	34.69
08	3.81	5.48	56	34.29	35.96
10	5.08	6.75	58	35.56	37.23
12	6.35	8.02	60	36.83	38.50
14	7.62	9.29	62	38.10	39.77
16	8.89	10.56	64	39.37	41.04
18	10.16	11.83	66	40.64	42.31
20	11.43	13.10	68	41.91	43.58
22	12.70	14.37	70	43.18	44.85
24	13.97	15.64	72	44.45	46.12
26	15.24	16.91	74	45.72	47.39
28	16.51	18.18	76	46.99	48.66
30	17.78	19.45	78	48.26	49.93
32	19.05	20.72	80	49.53	51.20
34	20.32	21.99	82	50.80	52.47
36	21.59	23.26	84	52.07	53.74
38	22.86	24.53	86	53.34	55.01
40	24.13	25.80	88	54.61	56.28
42	25.40	27.07	90	55.88	57.55
44	26.67	28.34	92	57.15	58.82
46	27.94	29.61	94	58.42	60.09
48	29.21	30.88	96	59.69	61.36
50	30.48	32.15	98	60.96	62.63
52	31.75	33.42	100	62.23	63.90

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 22745

22745

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.30
 .XX ±0.20

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
	A1	Modify Data	HZF	04/27/2016
	A0	NEW RELEASE	HZF	01/27/2015