
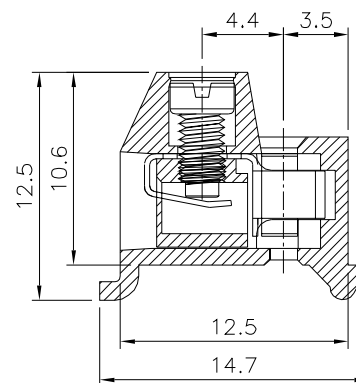
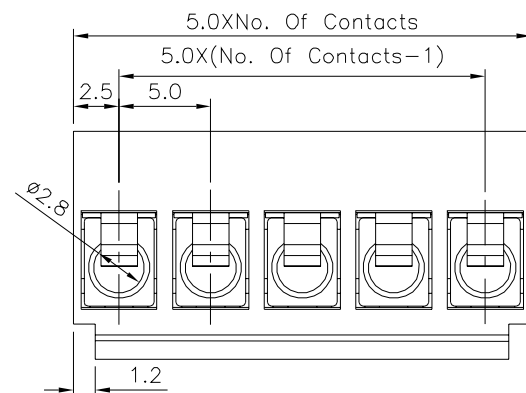


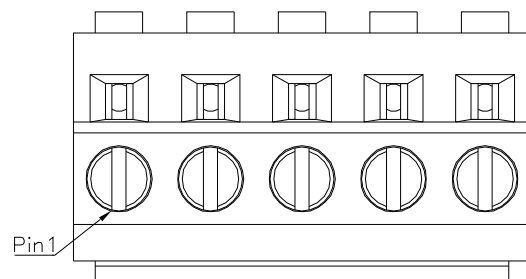

△ SPECIFICATION

Current Rating: 10A/Way Max.

Voltage Rating: 300V AC

Withstanding Voltage: 2500V AC/Minute

Contact Resistance: 20 Milliohms Max.

Wire Range: 14~26AWG

Torque: 4.0 kgf.cm/M2.5

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact: Copper Alloy, Nickel Plated

Terminal Screw:Steel,Galvanized With Cr3+ Plated

Wire Guard:Copper Alloy,Tin Plated

Insulator Body: Polyamide(UL94V-0), Black

RoHS Compliant

DRAWING No.

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.	± 0.50
.X	± 0.30
.XX	± 0.20
ANG.	$\pm 1^\circ$

	A1
---	----

Modify Data

HZF

09/02/2024

	A0
--	----

0	NEW RELEASE
---	-------------

HZF

02/21/2018

SCALE

NONE

REV.

A1

	UNIT
	120 120



NO	REV
----	-----

REVISIONS

CHK

02/21/2018	DATE
------------	------

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.