

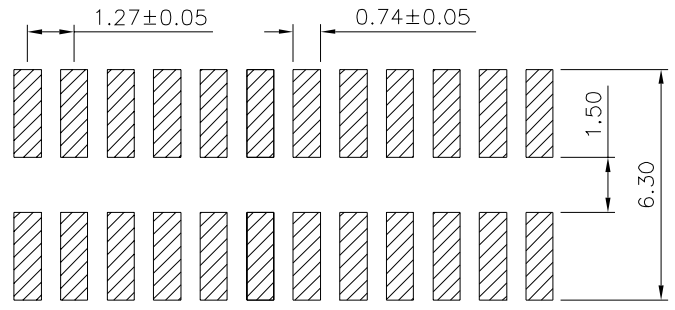
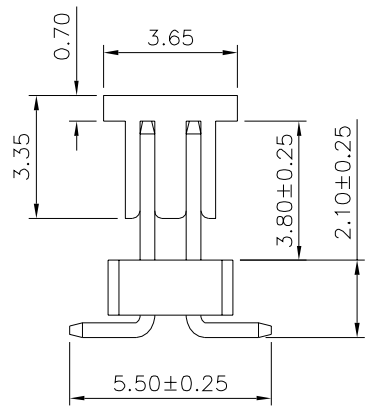


**SPECIFICATION**  
 Current Rating:1A  
 Insulation Resistance:1000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Withstand Voltage:500V AC/Minute  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

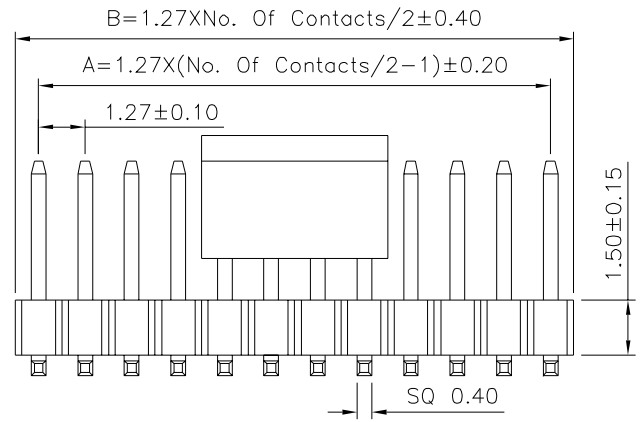

Recommended P.C.B Layout  
 (PCB Board Tolerance±0.05)

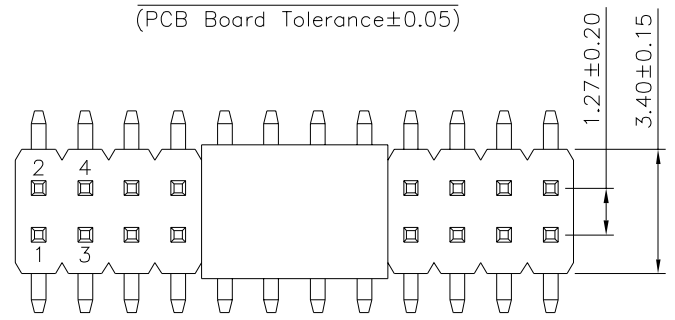

Pin	A	B	Pin	A	B	Pin	A	B
04	1.27	2.54	38	22.86	24.13	72	44.45	45.72
06	2.54	3.81	40	24.13	25.40	74	45.72	46.99
08	3.81	5.08	42	25.40	26.67	76	46.99	48.26
10	5.08	6.35	44	26.67	27.94	78	48.26	49.53
12	6.35	7.62	46	27.94	29.21	80	49.53	50.80
14	7.62	8.89	48	29.21	30.48	82	50.80	52.07
16	8.89	10.16	50	30.48	31.75	84	52.07	53.34
18	10.16	11.43	52	31.75	33.02	86	53.34	54.61
20	11.43	12.70	54	33.02	34.29	88	54.61	55.88
22	12.70	13.97	56	34.29	35.56	90	55.88	57.15
24	13.97	15.24	58	35.56	36.83	92	57.15	58.42
26	15.24	16.51	60	36.83	38.10	94	58.42	59.69
28	16.51	17.78	62	38.10	39.37	96	59.69	60.96
30	17.78	19.05	64	39.37	40.64	98	60.96	62.23
32	19.05	20.32	66	40.64	41.91	100	62.23	63.50
34	20.32	21.59	68	41.91	43.18			
36	21.59	22.86	70	43.18	44.45			

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±2°
22748		MEI		
		CHECKED BY HZF		
DRAWING BY		ZHZ		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	09/05/2023
		REVISIONS		