


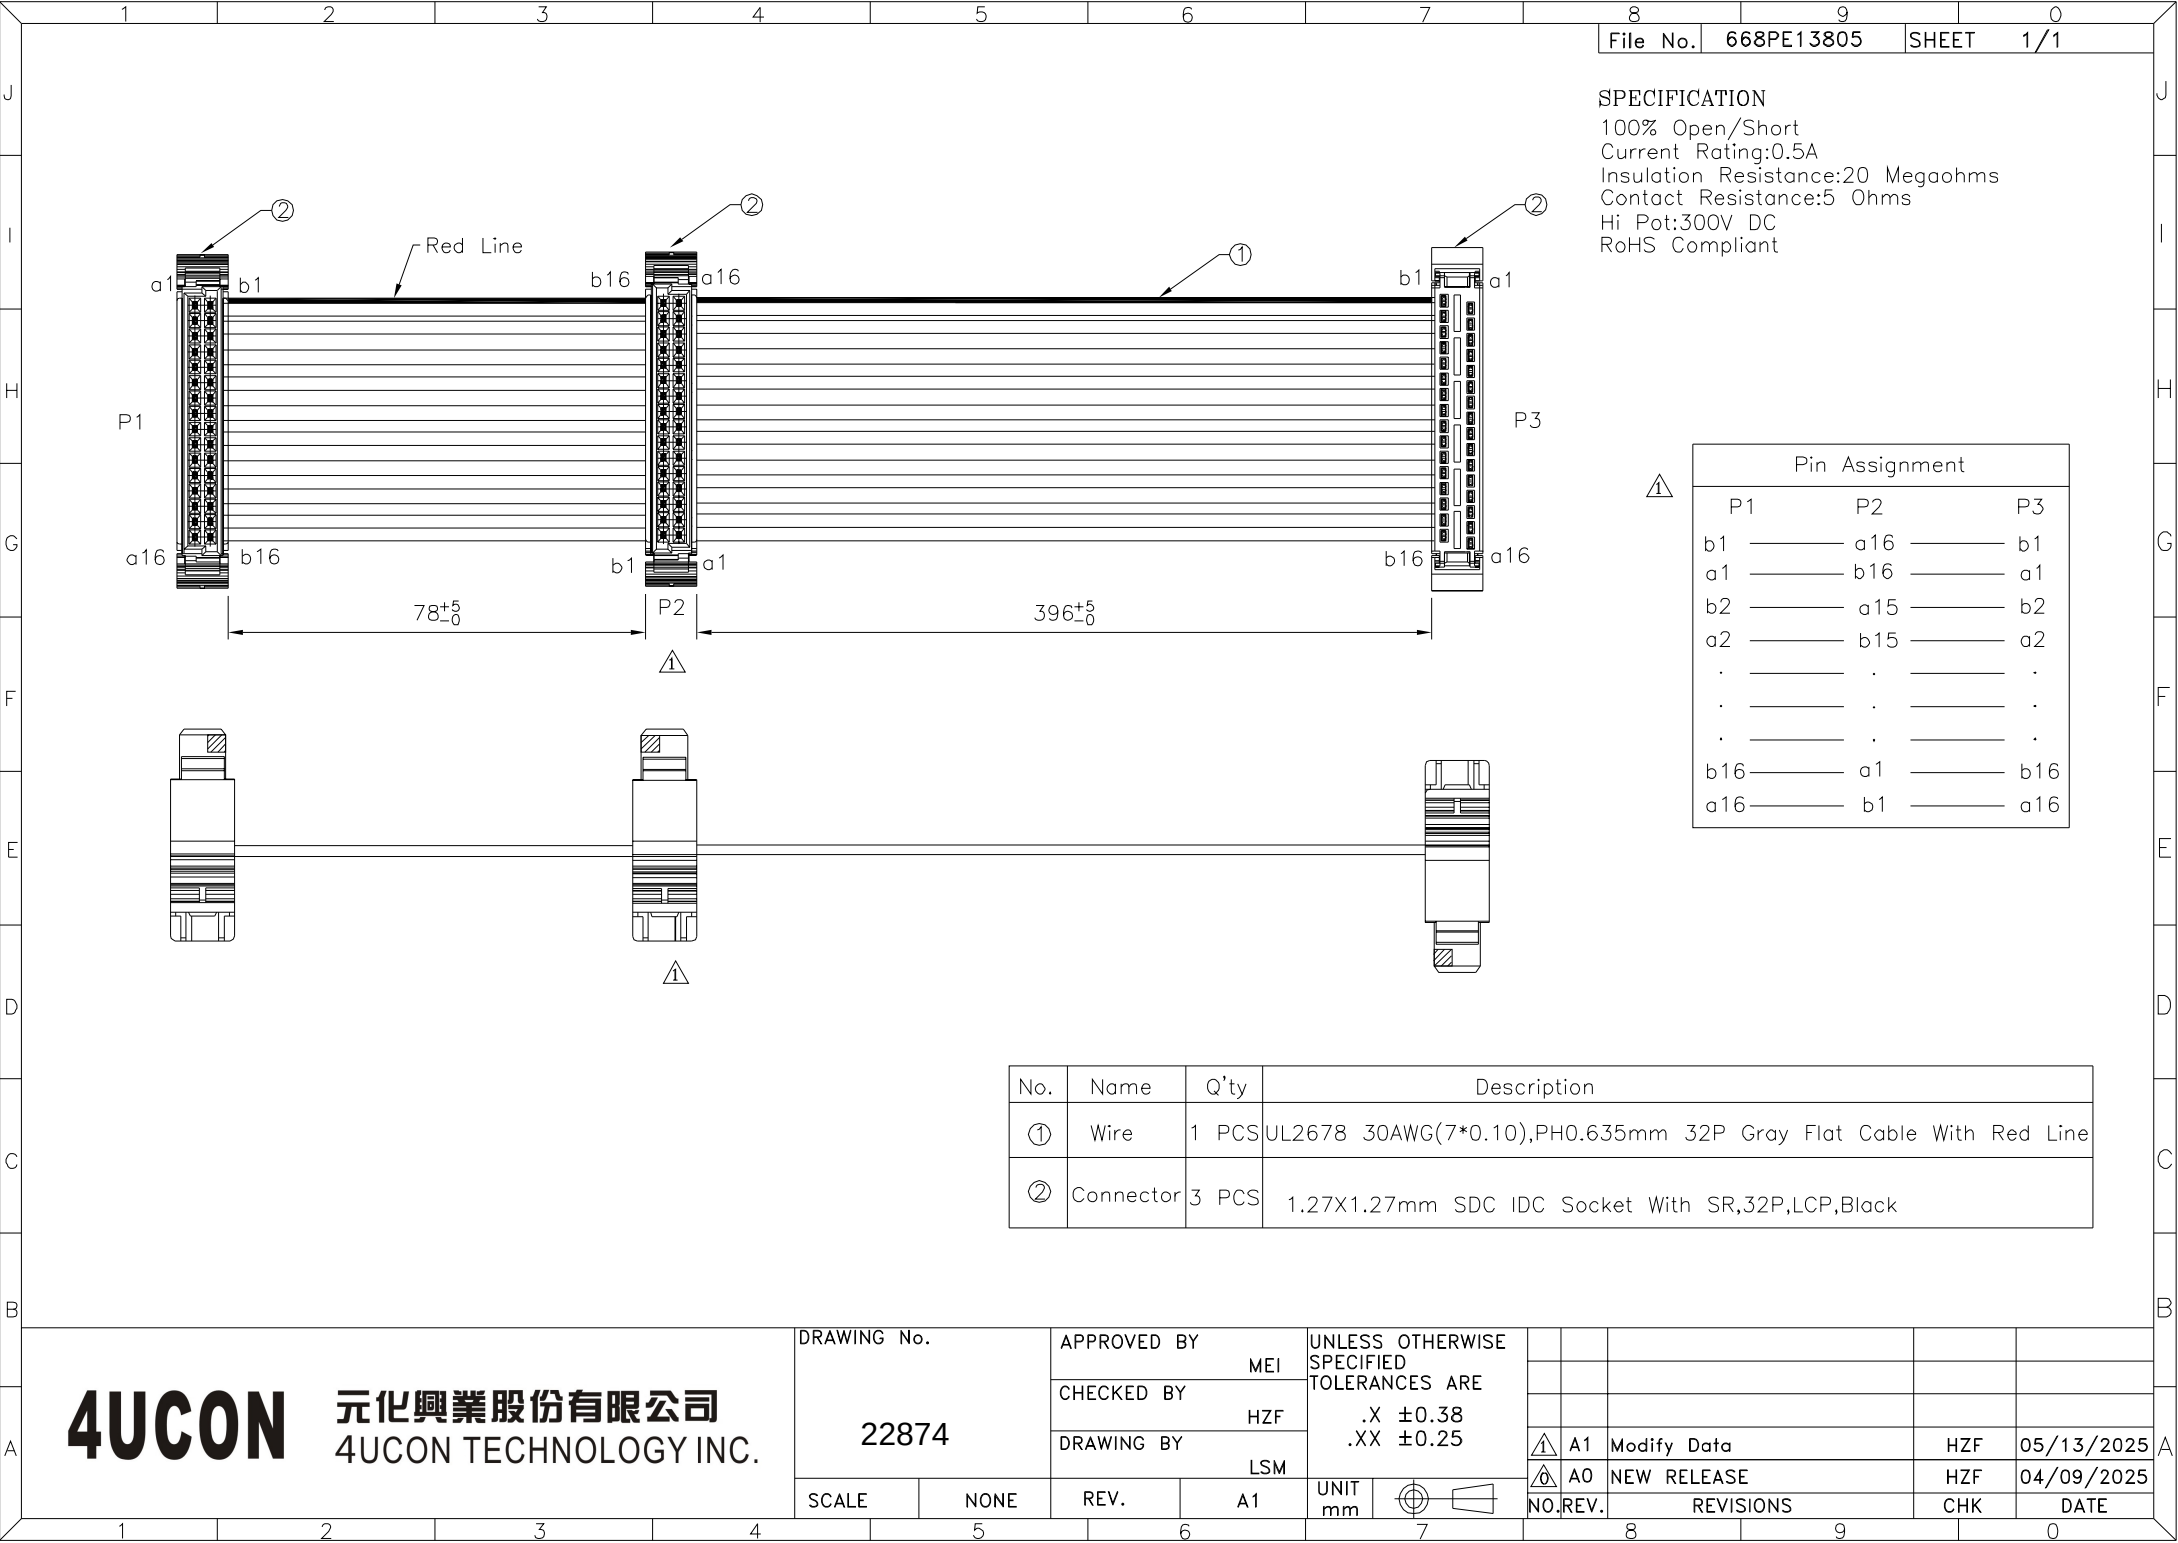

SPECIFICATION

100% Open/Short
Current Rating:0.5A
Insulation Resistance:20 Megaohms
Contact Resistance:5 Ohms
Hi Pot:300V DC
RoHS Compliant

Pin Assignment					
P1		P2		P3	
b1	_____	a16	_____	b1	
a1	_____	b16	_____	a1	
b2	_____	a15	_____	b2	
a2	_____	b15	_____	a2	
.	_____	.	_____	.	
.	_____	.	_____	.	
.	_____	.	_____	.	
b16	_____	a1	_____	b16	
a16	_____	b1	_____	a16	

No.	Name	Q'ty	Description
①	Wire	1 PCS	UL2678 30AWG(7*0.10),PH0.635mm 32P Gray Flat Cable With Red Line
②	Connector	3 PCS	1.27X1.27mm SDC IDC Socket With SR,32P,LCP,Black