
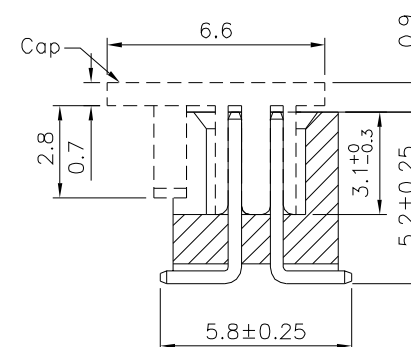
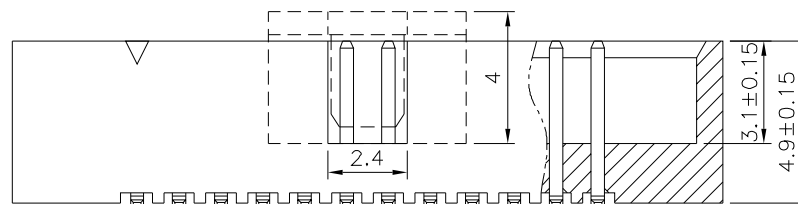
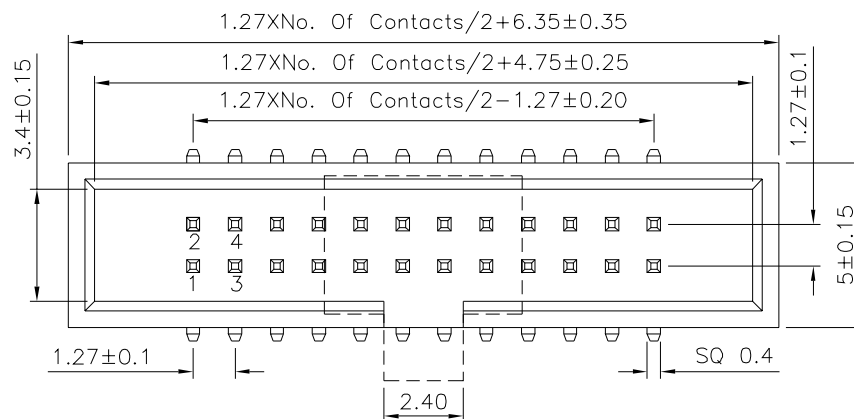


SPECIFICATION

Current Rating:1.0 Amp
Withstanding Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

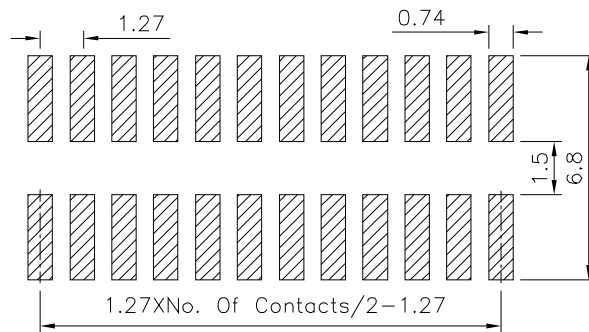

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22901

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2°
.X ±0.20 .X.* ±1.5°
.XX ±0.15 .XX.* ±1°
.XXX ±0.10 .XXX.* ±0.5°

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

06/03/2018