
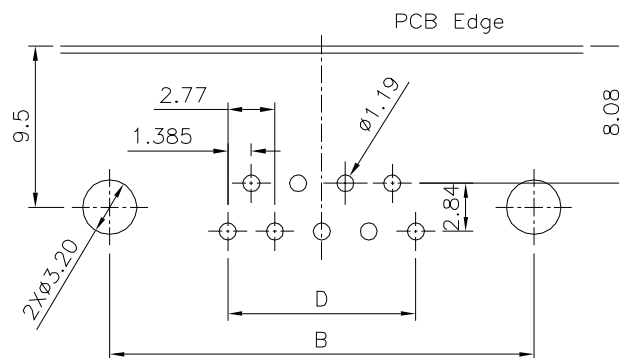
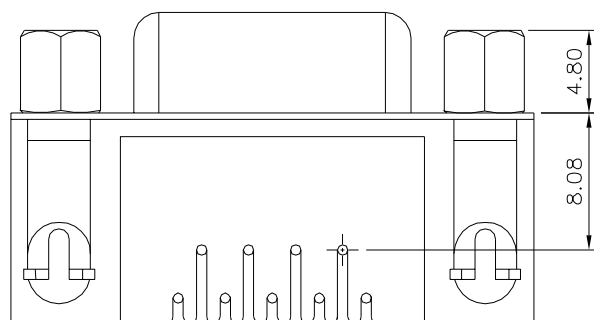



△△ SPECIFICATION

Current Rating:5A
 Insulation Resistance:1000 Megohms Min. At 500V DC
 Withstanding Voltage:1000V Per Minute
 Contact Resistance:30 Milliohms Max.10 Sec.
 Operating Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Shell:Steel,Nickel Plated Over All
 Square Rivet:Copper Alloy,Nickel Plated Over All
 Ground:Steel,Tin Plated On Solder Tails,Over Nickel
 Screw:Steel,Nickel Plated Over All
 RoHS Compliant

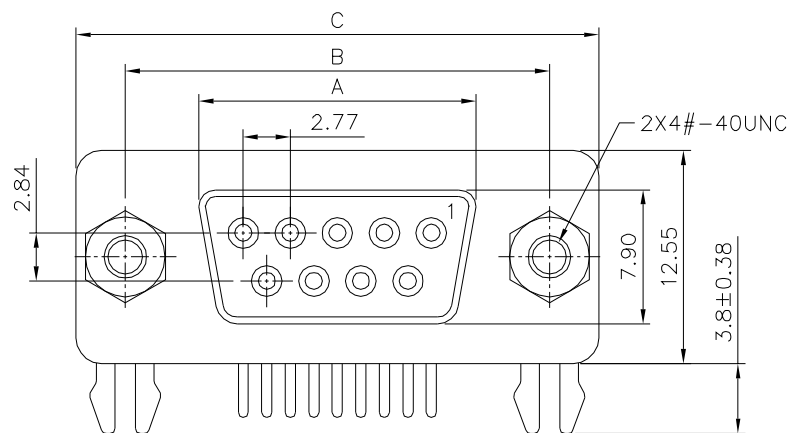

Pin	A±0.20	B±0.25	C±0.38	D
9	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22970

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△ .X ±0.38
 △ .XX ±0.25
 △ .XXX ±0.15

SCALE

NONE

REV.

A3

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	09/03/2025
△2	A2	Modify Data	HZF	08/27/2025
△1	A1	Modify Data	HZF	12/05/2019
△0	A0	NEW RELEASE	SHIN	02/20/2007