


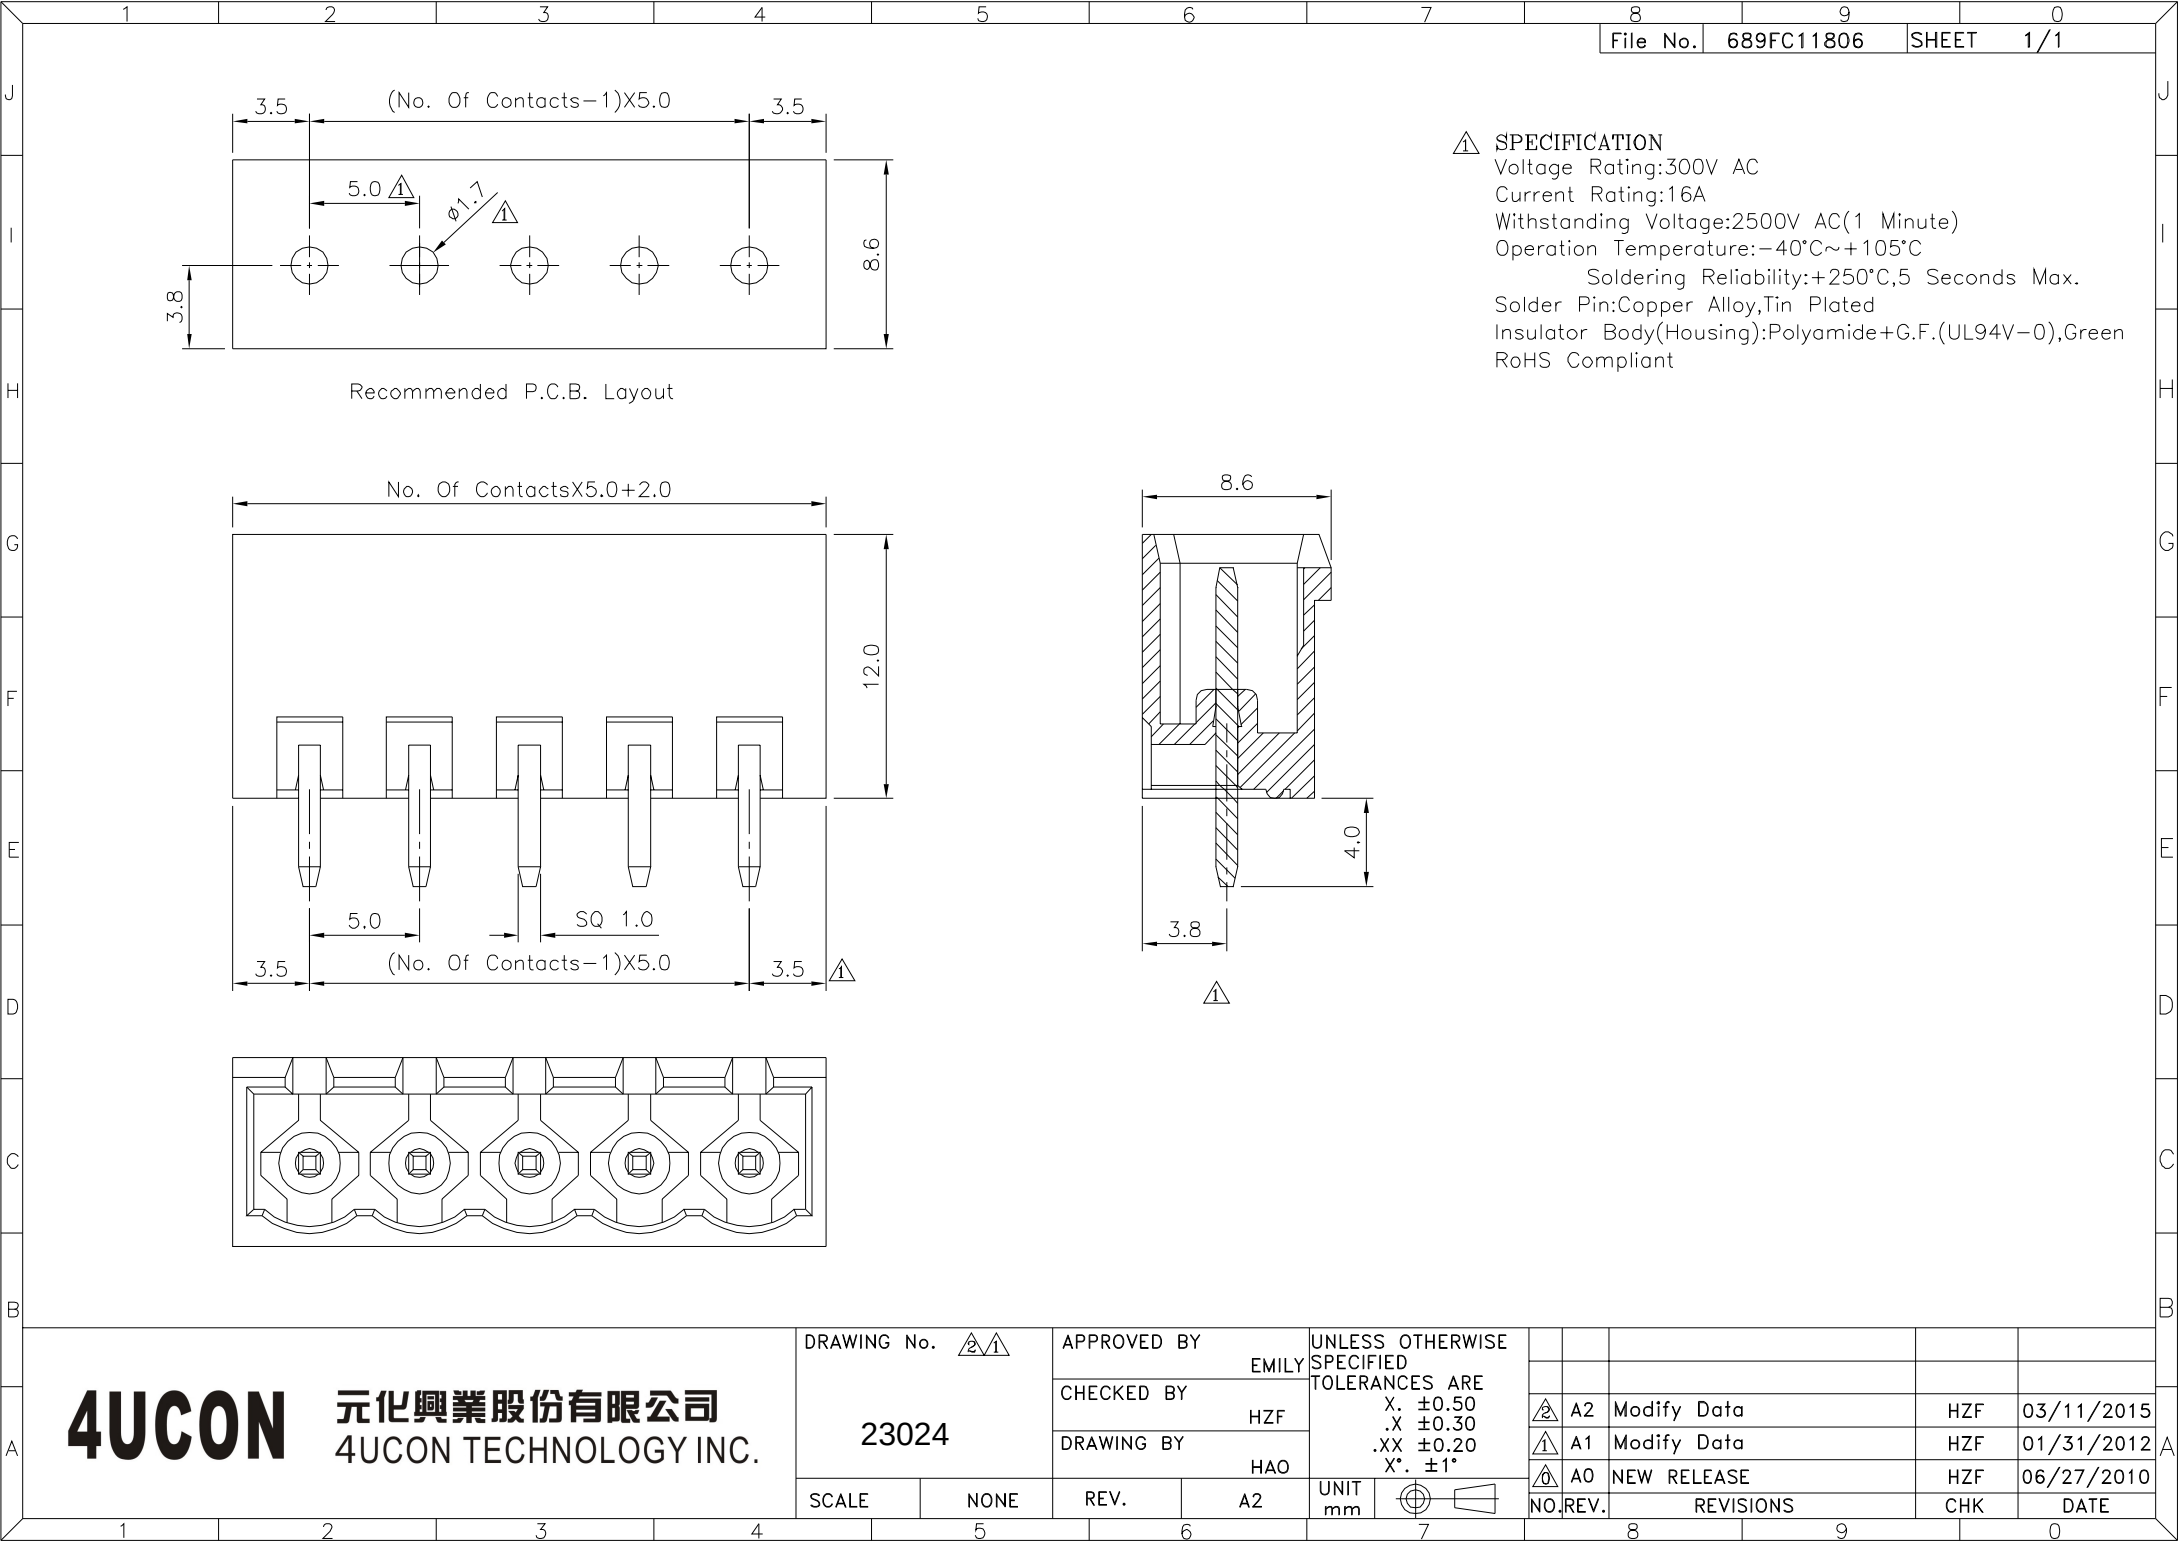

△ SPECIFICATION
Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Operation Temperature:-40°C~+105°C
Soldering Reliability:+250°C,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. **23024**

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
HAO

SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
X° $\pm 1^\circ$

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	03/11/2015
△1	A1	Modify Data	HZF	01/31/2012
△0	A0	NEW RELEASE	HZF	06/27/2010