


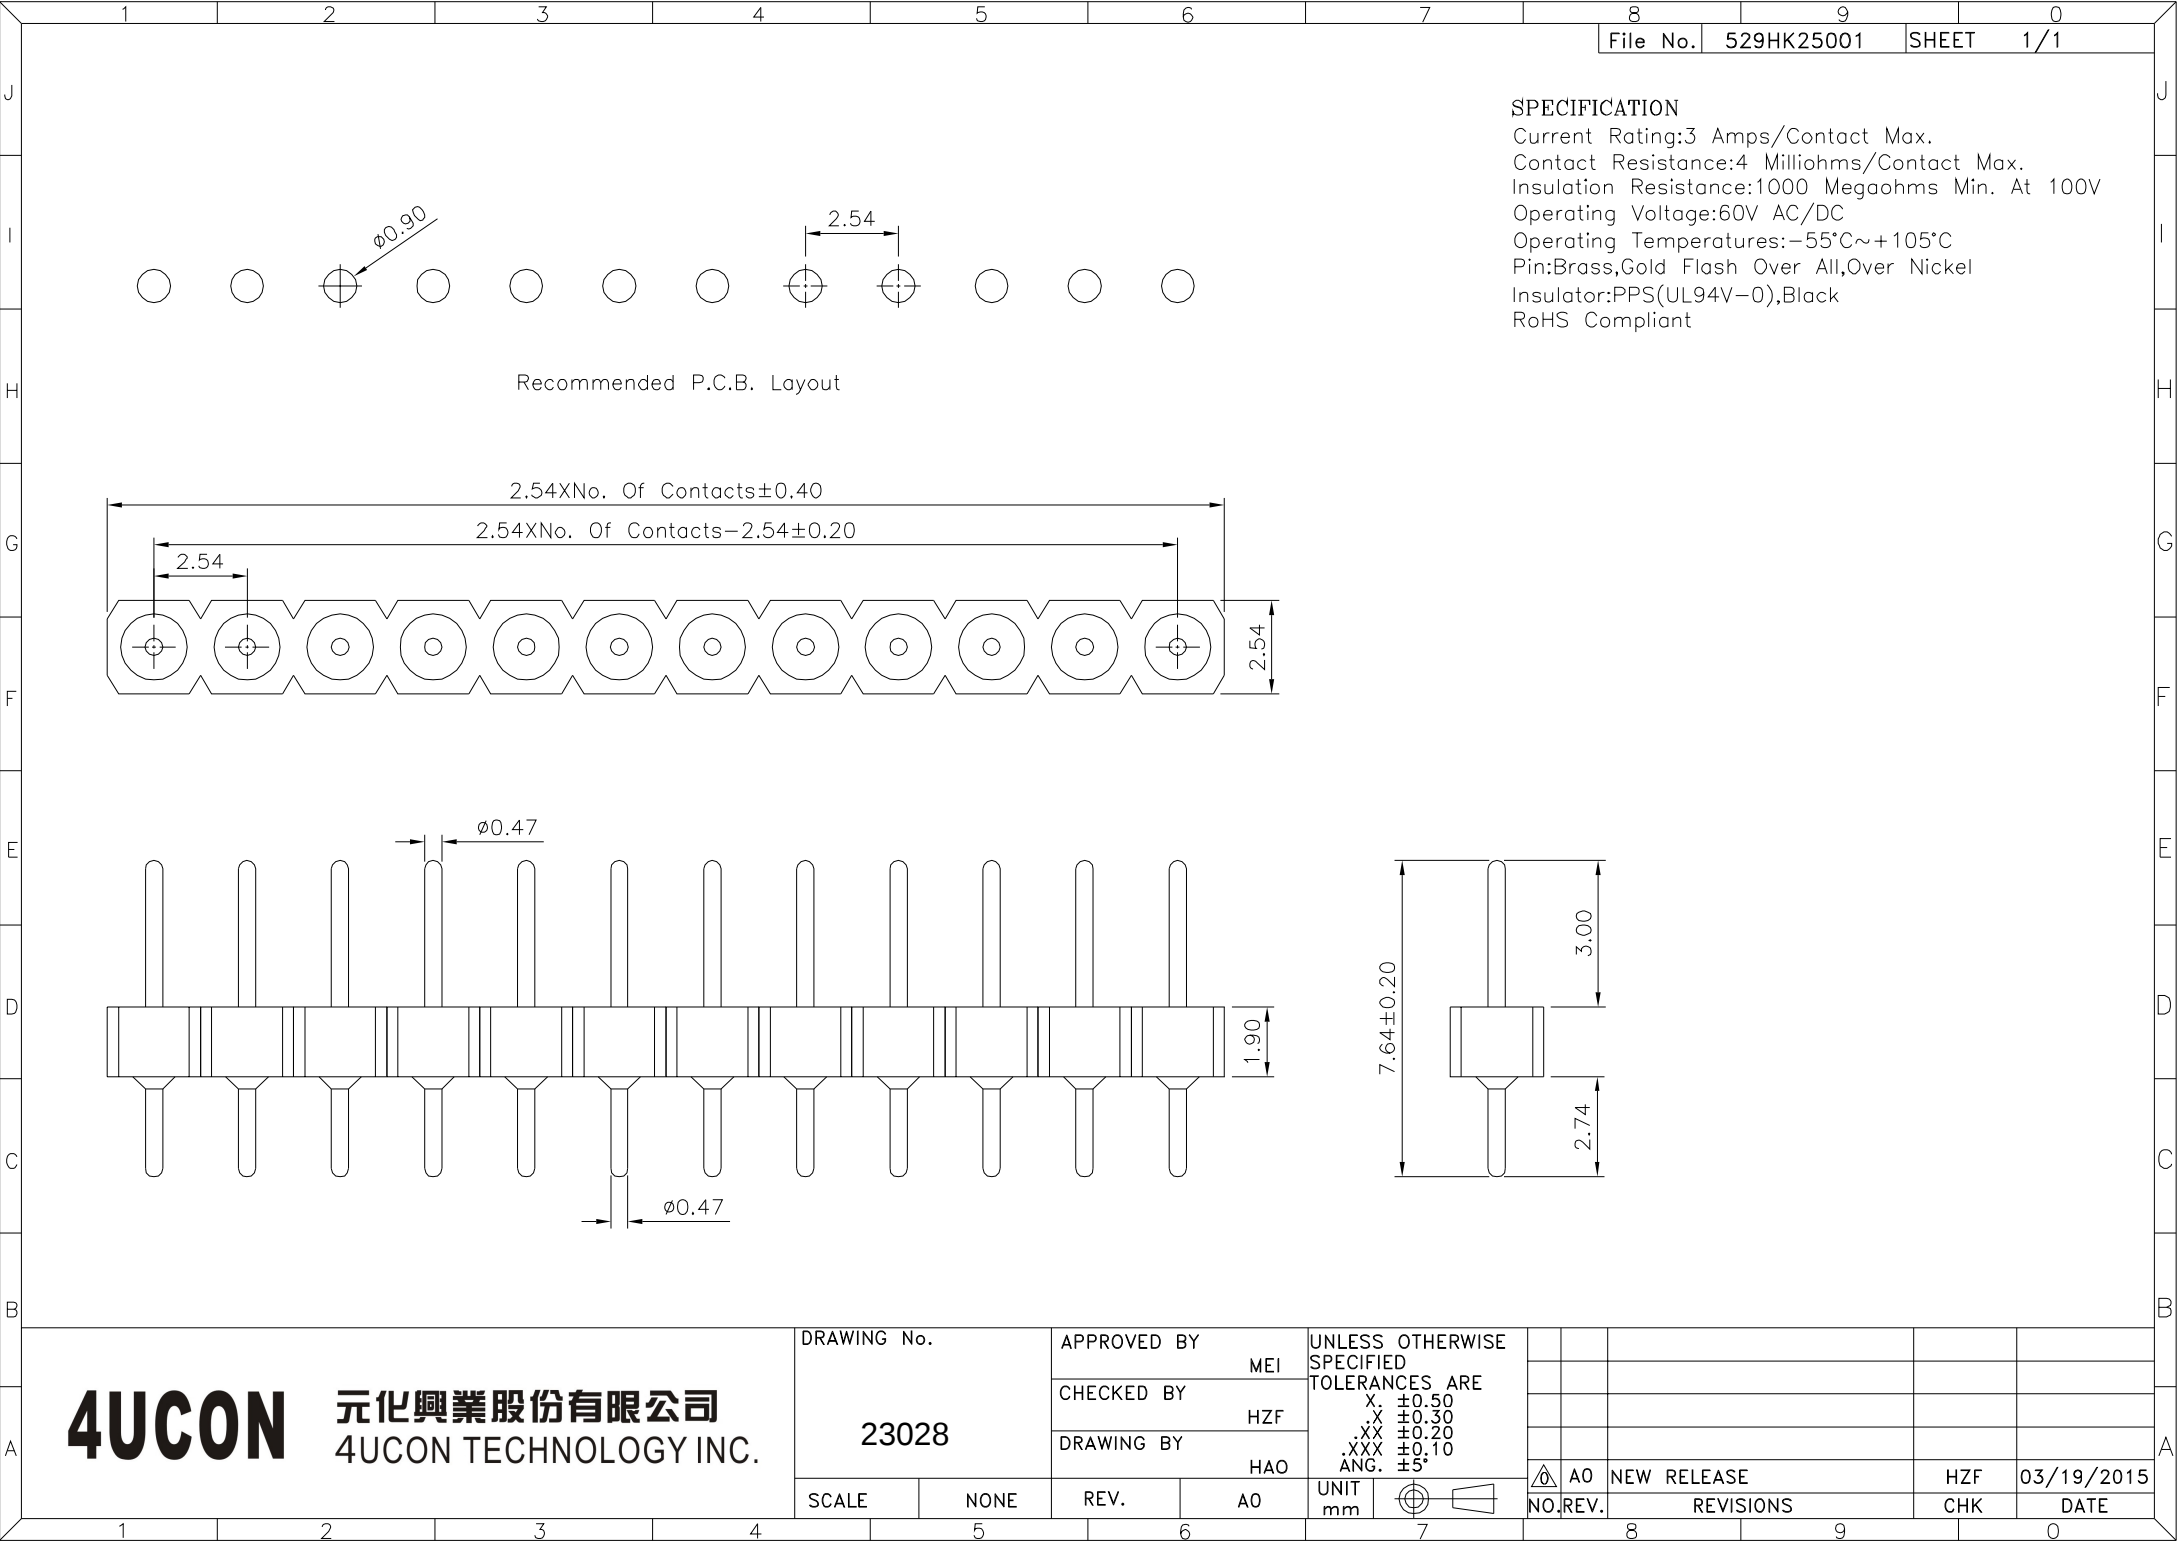

SPECIFICATION
Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Voltage:60V AC/DC
Operating Temperatures:-55°C~+105°C
Pin:Brass,Gold Flash Over All,Over Nickel
Insulator:PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23028


APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^\circ$

SCALE NONE

REV. A0

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	03/19/2015