
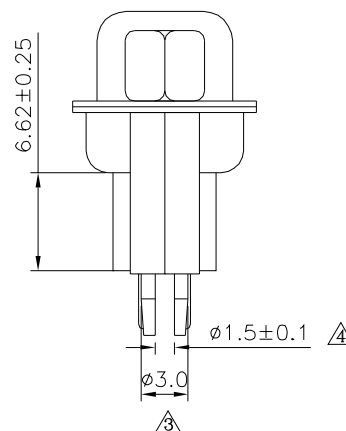
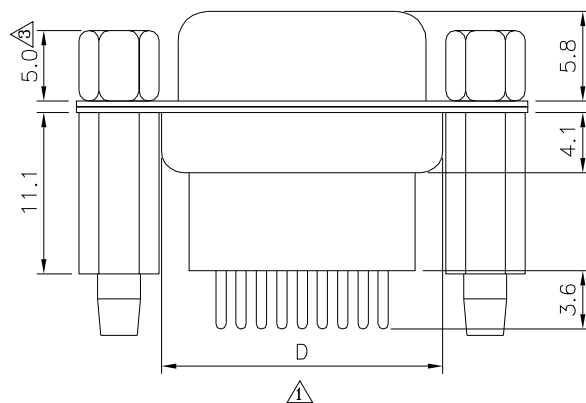
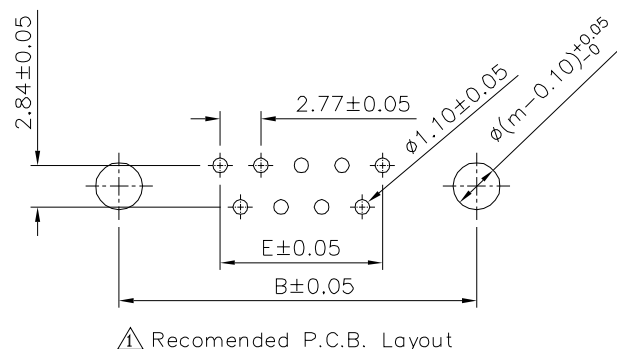


△ SPECIFICATION

Current Rating:3A
Voltage Rating:250V AC/RMS 60Hz
△ Contact Resistance:20 Milliohms Max.
At 1A DC
Insulation Resistance:1000 Megaohms At 500V DC
Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
For 1 Minute
Insulator:PBT(UL94V-0),Black
Contact:Brass
Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shell:Steel,Tin Plated Over Copper
Boardlock:Brass,Tin Plated
△ Screwlock:Steel,Nickel Plated
RoHS Compliant

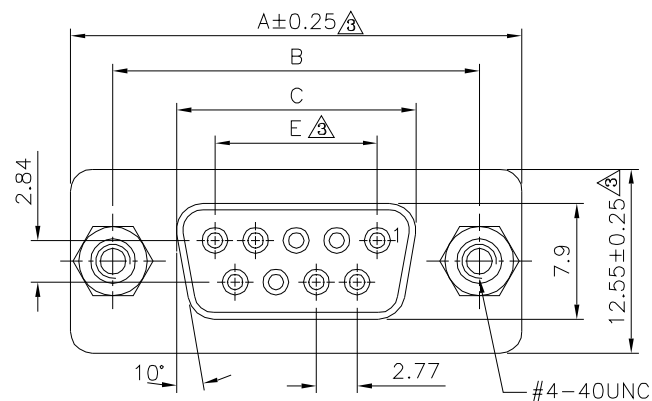

Pin	A	B	C	D	E
9	30.81	24.99	16.33	19.20	11.08
15	39.20	33.30	24.70	27.70	19.39
25	53.05	47.04	38.40	41.10	33.24
37	69.40	63.50	55.80	57.30	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △ △

23140

SCALE

NONE

REV.

B4

APPROVED BY Jason Wu


CHECKED BY Leo Han

DRAWING BY Michelle Lee

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ X. ±0.38 X.* ±3*
.X ±0.25 .X* ±1*
.XX ±0.13

UNIT mm



△ B4

Modify Data

HZF 09/14/2022

△ B3

Modify Data

HZF 05/27/2021

△ B2

Modify Data

HZF 04/19/2013

△ B1

Modify Data

HZF 08/05/2010

△ B0

NEW RELEASE

HZF 05/20/2009

NO.REV.

REVISIONS

CHK

DATE