
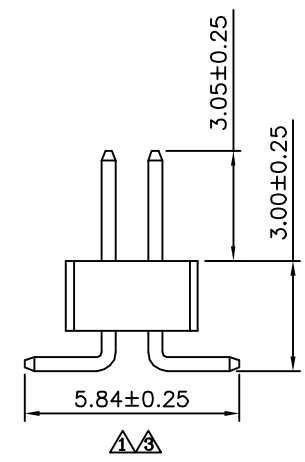
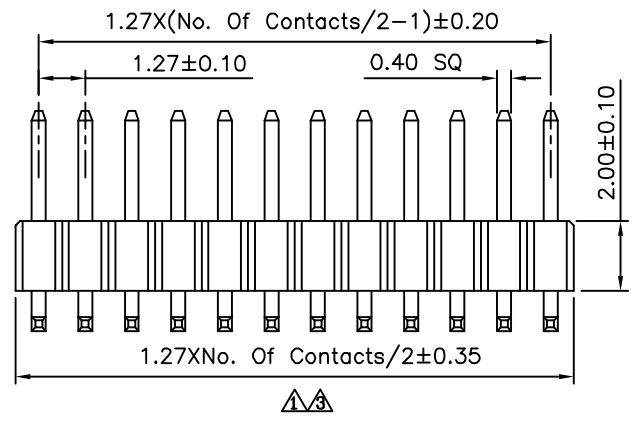


Recommended P.C.B. Layout

△△ SPECIFICATION

- Current Rating:1A
- Withstand Voltage:500V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- △ Contact:Copper Alloys,Gold Flash Over Nickel
- No. Of Contacts:04~100 Contacts
- RoHS Compliant

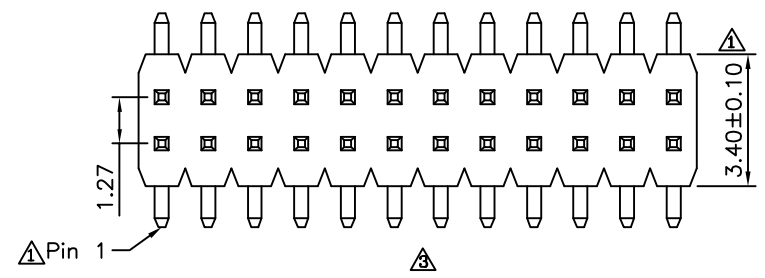

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°					
00623		EMILY			△ A3	Modify Data	HZF	12/26/2012	
		CHECKED BY			△ A2	Modify Data	HZF	11/30/2010	
		DRAWING BY		△ A1	Modify Data	HZF	10/26/2010		
		GAO		△ A0	NEW RELEASE	INGRID	06/06/2007		
SCALE	NONE	REV.	A3	UNIT	mm	NO. REV.	REVISIONS	CHK	DATE