

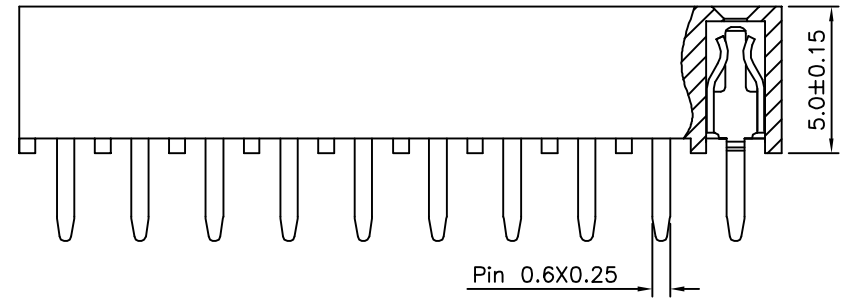


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ± 0.05)

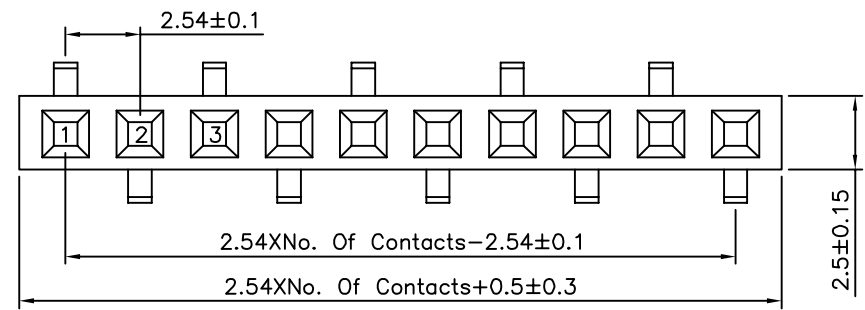

SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X.* $\pm 2^{\circ}$.X ± 0.20 .X* $\pm 1.5^{\circ}$.XX ± 0.15 .XX* $\pm 1^{\circ}$.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$
00687		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SAN		
SCALE	NONE	REV.	A0	

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	11/19/2013
		REVISIONS		