
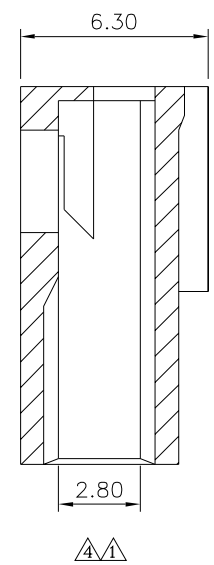
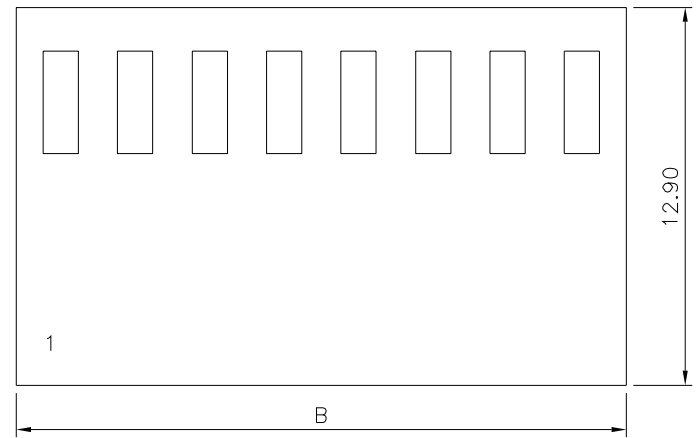


**SPECIFICATION**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC Max.  
 Operating Temperature: -25°C~+85°C  
 Insulation Resistance: 1000 Megaohms Min.  
 ⚠ Withstand Voltage: 1000V AC/Minute  
 ⚠ Contact Resistance: 20 Milliohms Max.  
 ⚠ Material: PA66(UL94V-2)  
 RoHS Compliant

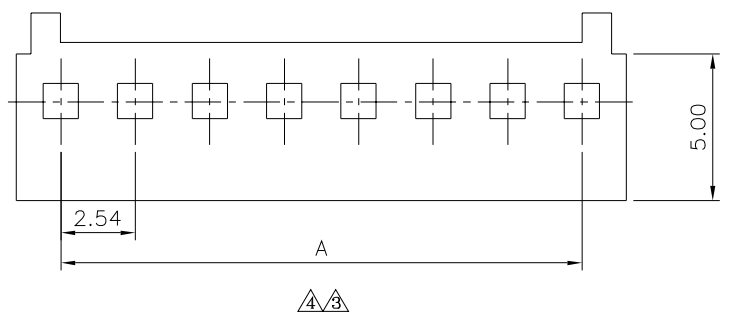

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 2.54  | 5.64  |
| 03  | 5.08  | 8.16  |
| 04  | 7.62  | 10.72 |
| 05  | 10.16 | 13.30 |
| 06  | 12.70 | 15.78 |
| 07  | 15.24 | 18.40 |
| 08  | 17.78 | 20.80 |
| 09  | 20.32 | 23.50 |
| 10  | 22.86 | 26.00 |
| 11  | 25.40 | 28.50 |
| 12  | 27.94 | 31.00 |
| 13  | 30.48 | 33.50 |
| 14  | 32.02 | 36.00 |
| 15  | 35.56 | 38.50 |
| 16  | 38.10 | 41.20 |
| 17  | 40.64 | 43.60 |
| 18  | 43.18 | 46.32 |
| 20  | 48.26 | 51.34 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|               |  |                |  |  |
|---------------|--|----------------|--|--|
| DRAWING No. ⚠ |  | APPROVED BY    |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>.X ±0.35<br>.XX ±0.25<br>ANG. |
| 01950         |  | MEI            |  |  |
|               |  | CHECKED BY HZF |  |  |
| SCALE         |  | DRAWING BY     |  | UNIT   |
| NONE          |  | REV. B4        |  | mm   |

|          |             |       |            |
|----------|-------------|-------|------------|
| ⚠ B4     | Modify Data | HZF   | 12/06/2018 |
| ⚠ B3     | Modify Data | HZF   | 09/09/2011 |
| ⚠ B2     | Modify Data | HZF   | 12/26/2008 |
| ⚠ B1     | Modify Data | HZF   | 07/21/2008 |
| ⚠ B0     | NEW RELEASE | BECKY | 07/19/2005 |
| NO. REV. | REVISIONS   | CHK   | DATE       |