File No.	307	SHEET	1/1



△2 Recommended P.C.B. Layout

△2 SPECIFICATION
Current Rating:3A AC/DC
Voltage Rating:250V AC Max.
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−25°C~+85°C
Terminal:Brass,Tin Plated
Insulator:PA66(UL94V−2),Natural
RoHS Compliant



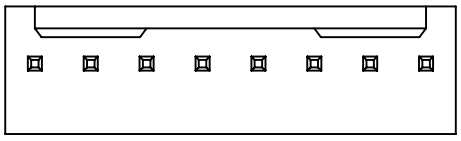

△2



(2 Through 5 Circuits)

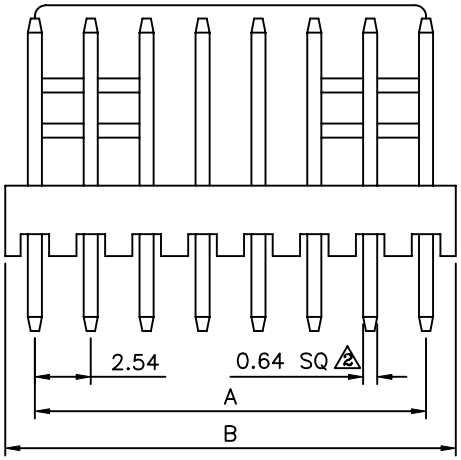

(6 Through 20 Circuits)

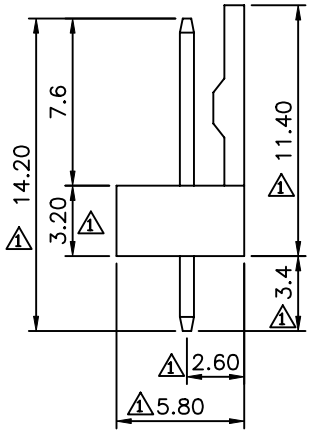

△2

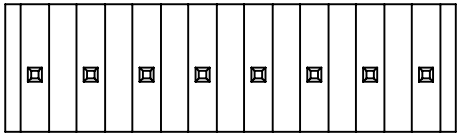

△2

Poles	A	B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.58
11	25.40	28.12
12	27.94	30.68
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.64	43.30
18	43.18	45.90
19	45.72	48.56
20	48.26	50.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
01970	MEI	△2 .X ±0.35
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY QQJ	
SCALE NONE	REV. A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	08/21/2010
△1	A1	Add Tolerance	BECKY	2005/05/12
△0	A0	NEW RELEASE	BECKY	