
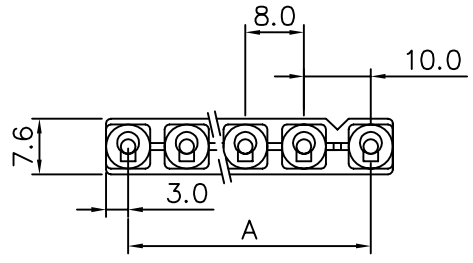
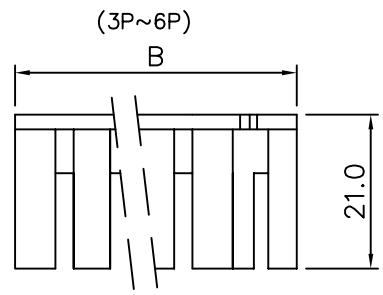


SPECIFICATIONS

Current Rating: 7A AC, DC
 Voltage Rating: 250V AC, DC
 Withstanding Voltage: 1500V AC/Minute
 Contact Resistance: Initial Value/10mΩ max.
 After Environmental Testing/20mΩ max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C To +85°C
 Applicable PC Board Thickness: 1.6mm
 Material: Nylon 66, UL 94V-0 Or 94V-2

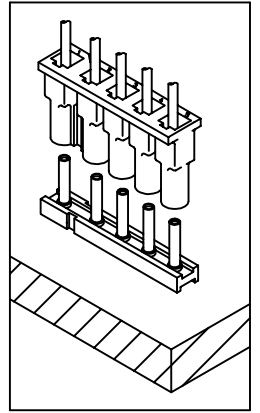

Position	A	B
03	18.0	24.0
04	26.0	32.0
05	34.0	40.0
06	42.0	48.0

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 02462

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE REV. A

UNIT mm

AREA REVISIONS CHK DATE