
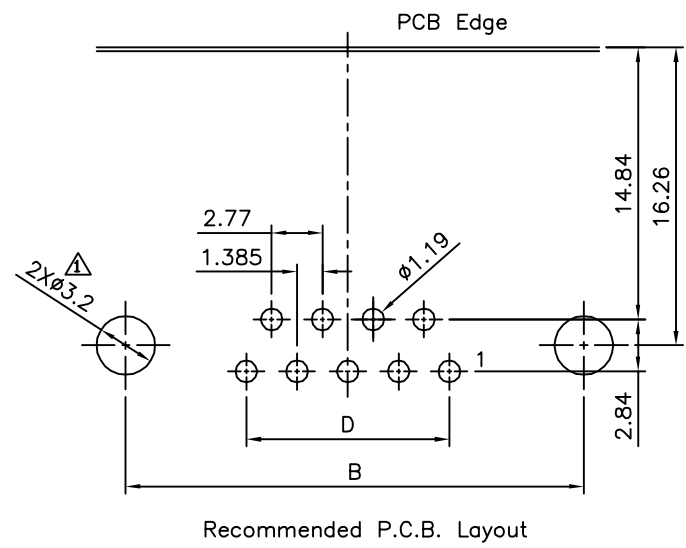


△ SPECIFICATION
 Current Rating: 5 Amp
 Dielectric Withstand Voltage: 1000V AC For 1 Minute
 Contact Resistance: 15 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At 500V DC
 Operation Temperature: -55°C ~ +105°C
 Insulator: PBT (UL94V-0), Black
 Contact: Copper Alloy, Gold Flash Over Nickel
 Shell: Steel, Nickel Plated
 Boardlock: Brass, Tin Plated
 Riveted Insert: Brass, Nickel Plated
 RoHS Compliant

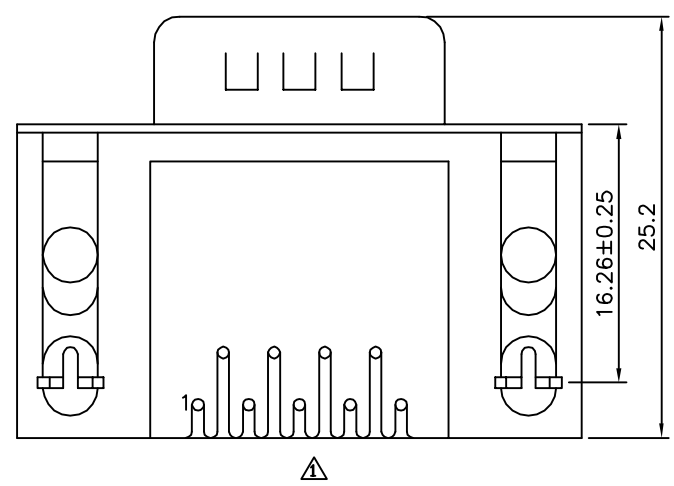

△ Pin	A±0.20	B±0.20	C±0.38	D
09	16.90	25.00	30.80	11.08
15	25.25	33.30	39.20	19.39
25	38.95	47.05	53.05	33.24
37	55.40	63.50	69.40	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 03139
 APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY WSS
 SCALE NONE REV. A1
 UNIT mm
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.25
 .XX ±0.15
 .XXX ±0.05
 ANG. ±1°

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/21/2011
△ A0		NEW RELEASE	SHIN	03/24/2007