

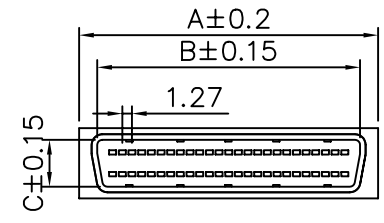


SPECIFICATION

Current Rating: 1A
 Insulation Resistance : 500 Megohms/Min.
 Withstanding Voltage : 500V AC/RMS For 1 Minute
 Contact Resistance : 35 Milliohms Max.
 Temperature Range : -55°C To +105°C
 Housing :Thermoplasitc P.B.T UL 94V-0,Black
 Contact: Phosphor Bronze Gold Selective Plated
 Front Shell : Steel,Nickel Plated Over Copper



Circuits	A	B	C	D	E	F	G
68	50.60	46.35	5.70	42.40	63.80	38.20	19.80

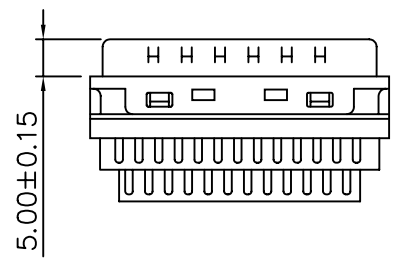

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 06107

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE REV. A UNIT mm AREA REVISIONS CHK DATE