
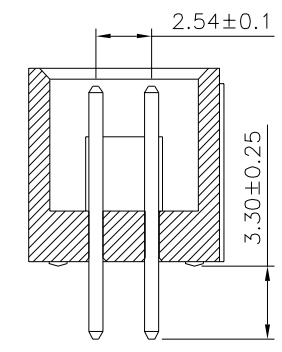
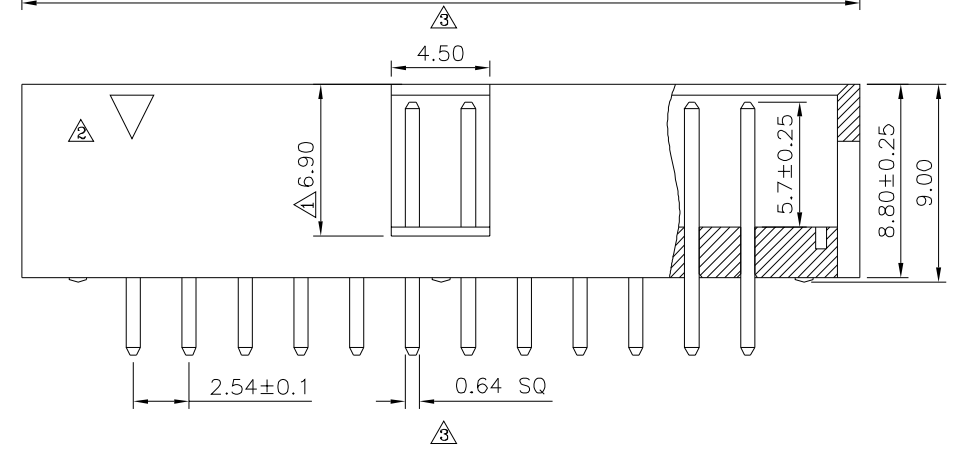


Recommended P.C.B. Layout
Tolerance: ±0.05 (Top View)

SPECIFICATION
 Current Rating: 3 Amp
 Withstand Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

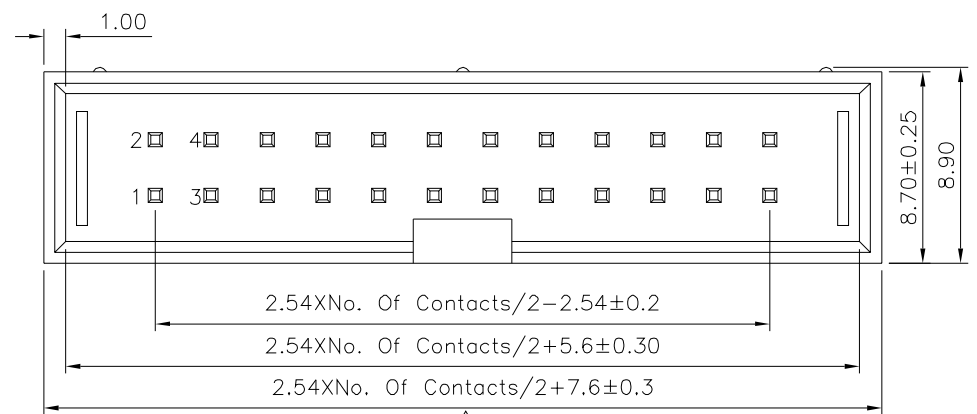

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. Δ		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	Δ A4	Modify Data	HZF	01/10/2023
06205		EMILY			Δ A3	Modify Data	HZF	04/17/2015
		CHECKED BY			Δ A2	Modify Data	HZF	11/20/2013
SCALE		NONE		Δ A1	Modify Data	HZF	09/03/2013	
		REV.		A4	Δ A0	NEW RELEASE	HZF	12/14/2010
				UNIT	NO. REV.		REVISIONS	CHK
				mm				DATE

DRAWING BY		HAO		UNIT		NO. REV.		REVISIONS	CHK	DATE
				mm						