
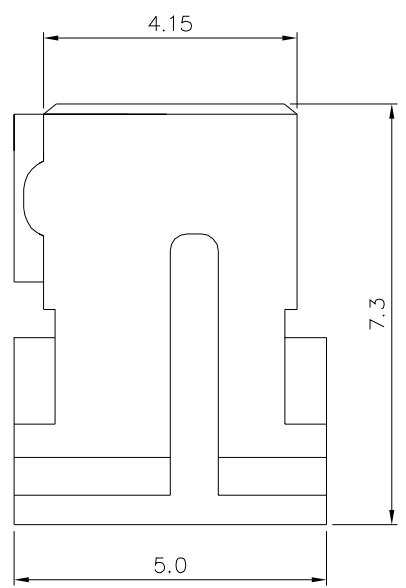
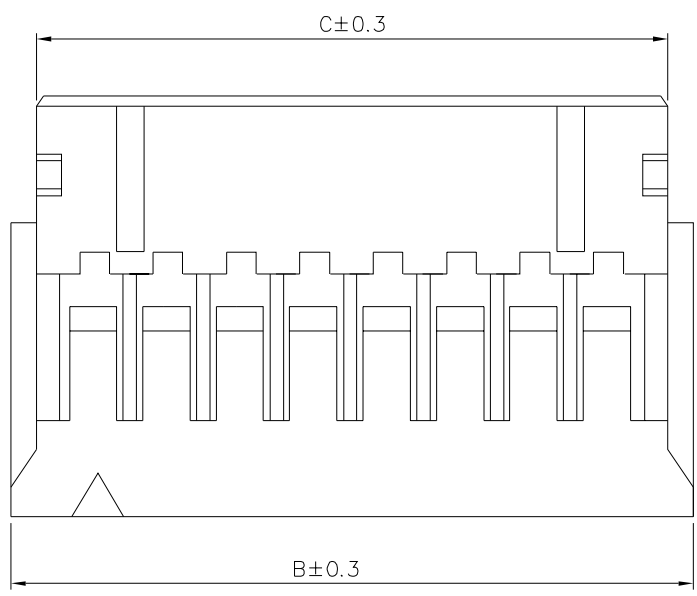


**△ SPECIFICATION**  
 Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC/DC  
 Withstanding Voltage: 800V AC/Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Temperature Range: -40°C ~ +105°C  
 Insulator: PA66(UL94V-0), White  
 RoHS Compliant

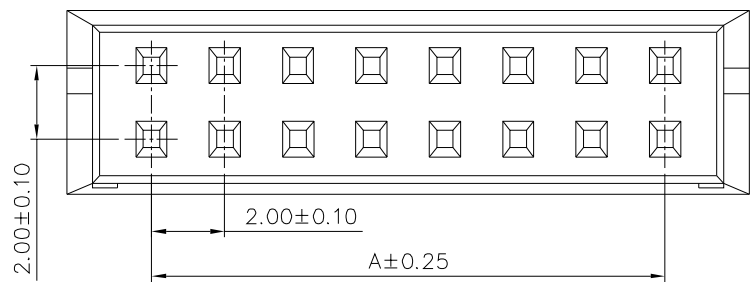

△ Pin	A	B	C
04	2.00	6.00	4.40
06	4.00	8.00	6.40
08	6.00	10.00	8.40
10	8.00	12.00	10.40
12	10.00	14.00	12.40
14	12.00	16.00	14.40
16	14.00	18.00	16.40
18	16.00	20.00	18.40
20	18.00	22.00	20.40
22	20.00	24.00	22.40
24	22.00	26.00	24.40
26	24.00	28.00	26.40
28	26.00	30.00	28.40
30	28.00	32.00	30.40
32	30.00	34.00	32.40
34	32.00	36.00	34.40
36	34.00	38.00	36.40
38	36.00	40.00	38.40
40	38.00	42.00	40.40
42	40.00	44.00	42.40
44	42.00	46.00	44.40

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 ANG. ±2° .XX ±0.2 .XXX ±0.1
09748		EMILY		
		CHECKED BY		
HZF		DRAWING BY		
CYP		A1		UNIT
SCALE	NONE	REV.	A1	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	06/26/2021
△ A0		NEW RELEASE	HZF	09/26/2014