
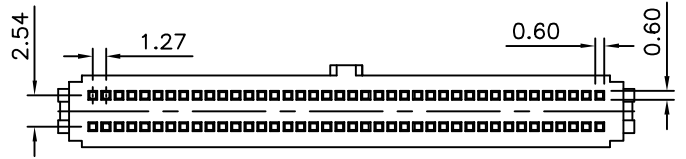

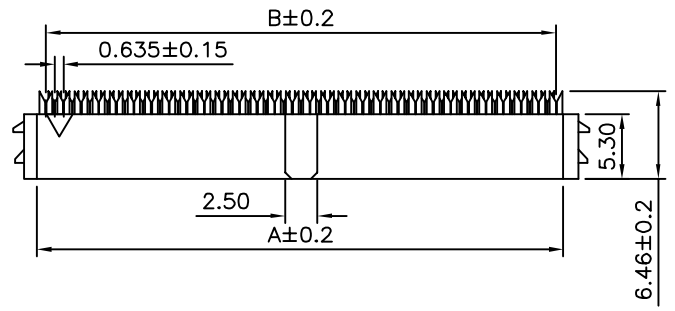



**△△△ SPECIFICATION**

Current Rating:1A Max.  
 Insulation Resistance:500 Megaohms Min. At 50V DC  
 Dielectric Withstanding Voltage:500V(RMS) AC For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 Operation Temperature:-40°C~+85°C  
 Insulation:PBT(UL94V-0),Black  
 Contact:Phosphor Bronze,  
 Gold Flash On Contact Area,Over Nickel  
 RoHS Compliant

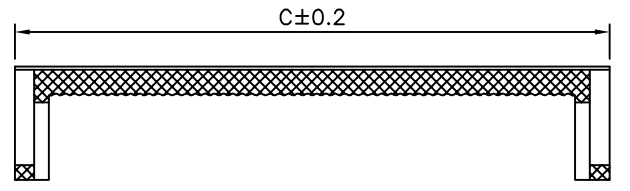

△

△

△	Pin	A	B	C
	10	6.45	5.715	11.25
	14	8.99	8.255	13.79
△	16	10.26	9.525	15.06
	20	12.80	12.065	17.60
	22	14.07	13.335	18.87
	26	16.61	15.875	21.41
	30	19.15	18.415	23.95
	34	21.69	20.955	26.49
	40	25.50	24.765	30.30
	44	28.04	27.305	32.84

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .XX ±0.10 .XXX ±0.03
10062		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	B4	⊕

△	B4	Modify Data	HZF	12/23/2014
△	B3	Modify Data	HZF	11/26/2013
△	B2	Modify Data	HZF	12/10/2009
△	B1	Modify Data	HZF	07/14/2009
△	B0	NEW RELEASE	HZF	06/20/2009
NO. REV.	REVISIONS		CHK	DATE