
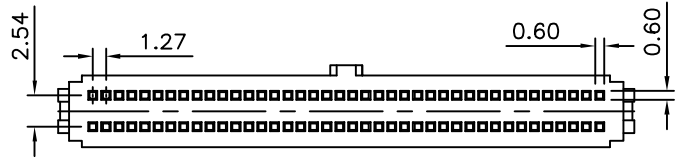

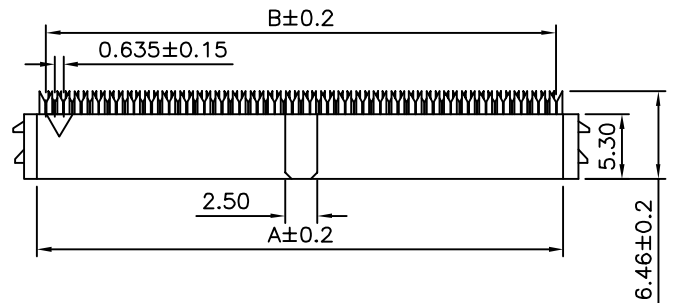



△△△ SPECIFICATION
 Current Rating:1A Max.
 Insulation Resistance:500 Megaohms Min. At 50V DC
 Dielectric Withstanding Voltage:500V(RMS) AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Operation Temperature:-40°C~+85°C
 Insulation:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,
 Gold Flash On Contact Area,Over Nickel
 RoHS Compliant

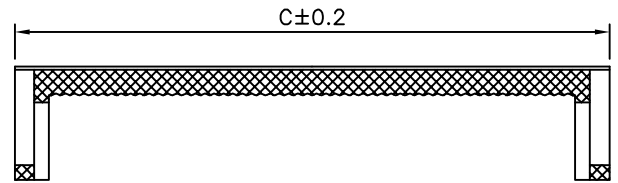

△

△

△	Pin	A	B	C
	10	6.45	5.715	11.25
	14	8.99	8.255	13.79
△	16	10.26	9.525	15.06
	20	12.80	12.065	17.60
	22	14.07	13.335	18.87
	26	16.61	15.875	21.41
	30	19.15	18.415	23.95
	34	21.69	20.955	26.49
	40	25.50	24.765	30.30
	44	28.04	27.305	32.84

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.03
10064		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	B4	NO. REV.

△	B4	Modify Data	HZF	12/23/2014
△	B3	Modify Data	HZF	11/26/2013
△	B2	Modify Data	HZF	12/10/2009
△	B1	Modify Data	HZF	07/14/2009
△	B0	NEW RELEASE	HZF	06/20/2009
NO. REV.		REVISIONS	CHK	DATE