


SPECIFICATIONS
 Impedance:75 Ohm
 Voltage:500V R.M.S.
 Interface PER MIL-C-39012C
 Body:Zinc Alloy,Nickel Plated Or Tin Lead Plated
 Insulator:TPX or PE-606
 Center Contact:Phosphor Bronze,Gold Plated

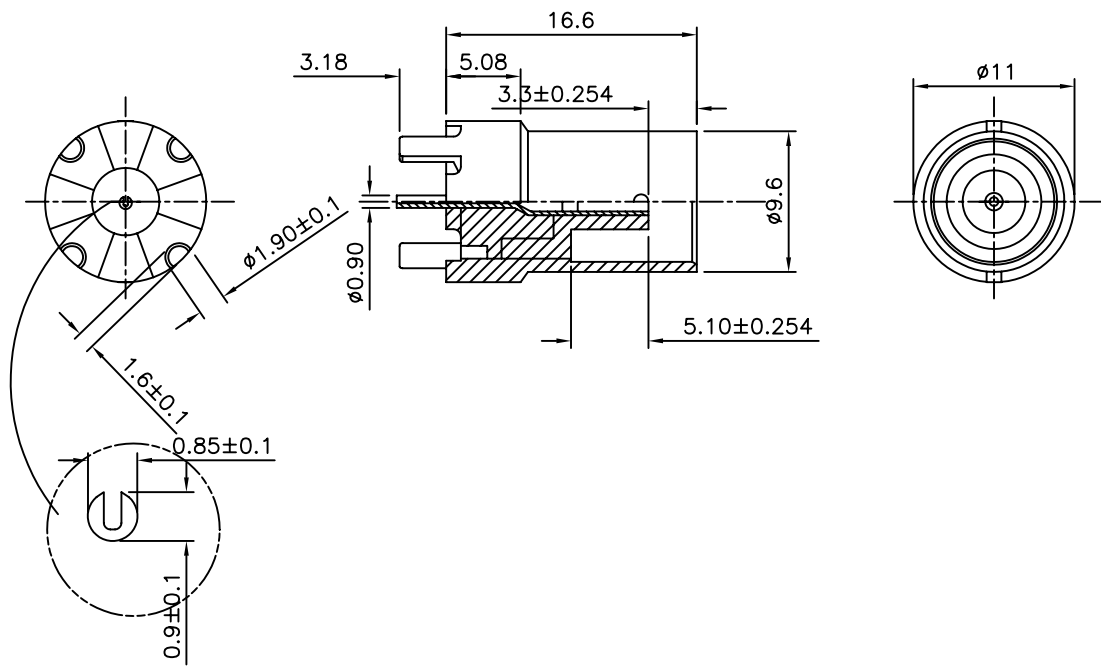

Detail

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX
10908		MEI		
		BECKY		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	MEI	