






Recommended P.C.B. Layout

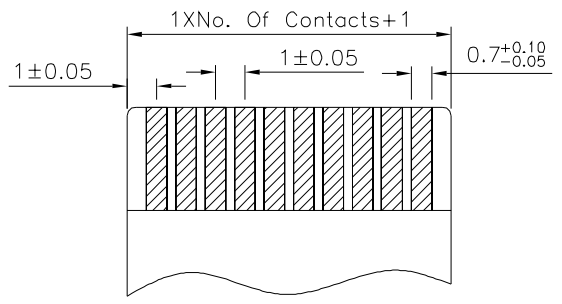

Proper Cable (Thickness:  $0.3 \pm 0.02$ mm)

**SPECIFICATION**

- 1. Material & Finish  
Housing: PA66 (UL94V-0)  
Contact: Phosphor Bronze, Tin Plated
- 2. Electrical Characteristics  
Voltage Rating: 50V AC/DC  
Current Rating: 0.5A AC/DC  
Withstand Voltage: 500V AC/Minute  
Contact Resistance: 30 Milliohms Max.  
Insulation Resistance: 500 Megaohms Min.
- 3. Environmental Characteristics  
Working Temperature:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4. RoHS Compliant

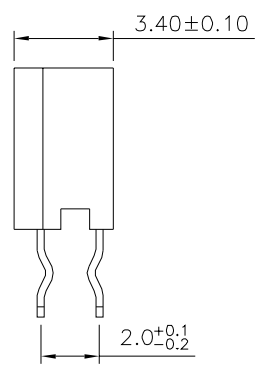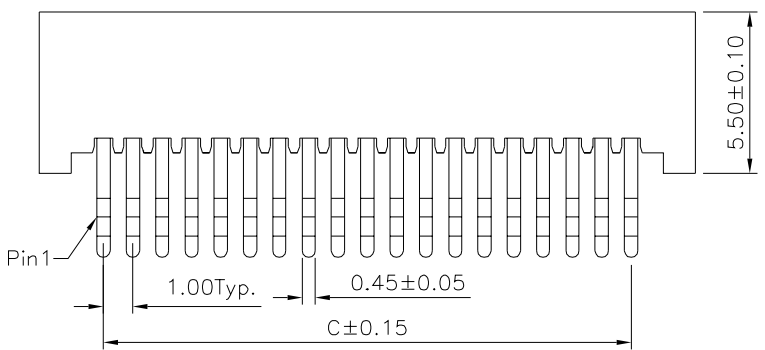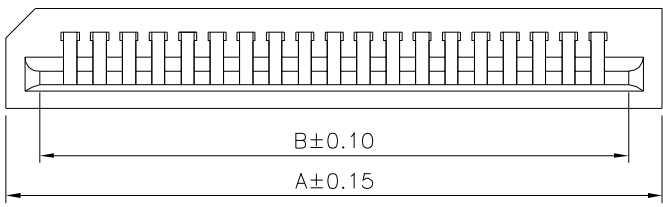

Pin	A	B	C	Pin	A	B	C
3	6.50	4.10	2.00	22	25.50	23.10	21.00
*4	7.50	5.10	3.00	*23	26.50	24.10	22.00
*5	8.50	6.10	4.00	*24	27.50	25.10	23.00
*6	9.50	7.10	5.00	*25	28.50	26.10	24.00
*7	10.50	8.10	6.00	26	29.50	27.10	25.00
*8	11.50	9.10	7.00	27	30.50	28.10	26.00
*9	12.50	10.10	8.00	*28	31.50	29.10	27.00
*10	13.50	11.10	9.00	29	32.50	30.10	28.00
*11	14.50	12.10	10.00	*30	33.50	31.10	29.00
*12	15.50	13.10	11.00	31	34.50	32.10	30.00
13	16.50	14.10	12.00	32	35.50	33.10	31.00
*14	17.50	15.10	13.00	33	36.50	34.10	32.00
15	18.50	16.10	14.00	34	37.50	35.10	33.00
*16	19.50	17.10	15.00	35	38.50	36.10	34.00
17	20.50	18.10	16.00	36	39.50	37.10	35.00
*18	21.50	19.10	17.00	37	40.50	38.10	36.00
*19	22.50	20.10	18.00	38	41.50	39.10	37.00
*20	23.50	21.10	19.00	39	42.50	40.10	38.00
21	24.50	22.10	20.00	40	43.50	41.10	39.00

Note: The Mark Of "\*" Are Tooled Already

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.5$ XX $\pm 0.25$ XXX $\pm 0.15$ ANG. $\pm 2^{\circ}$
11447		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		CYP		
REV.		A0		NO. REV.
				REVISIONS

AO	NEW RELEASE	HZF	11/05/2019
CHK	DATE		