File No.	432IJ17806	SHEET	1/1 ⚠1

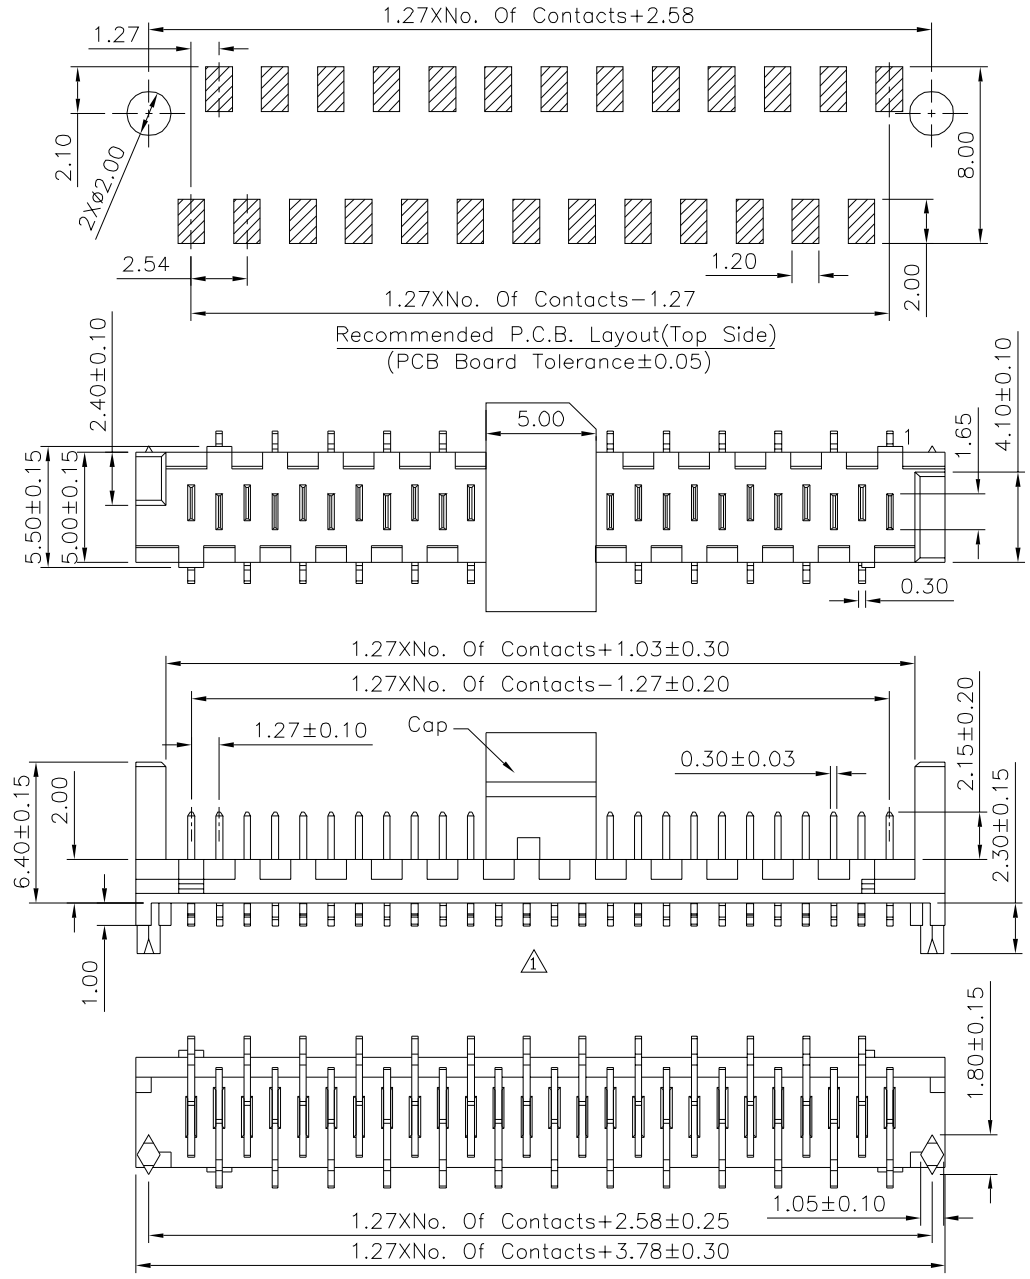



SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:LCP+30%G.F.(UL94V−0),Black
Contact:Phosphor Bronze,Tin Plated Over Nickel
⚠2 No. Of Contacts:04,06,08,10,12,14,16,18,20
22,24,26 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	17767		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	CYP		
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠2	A2	Modify Data	HZF	10/17/2018
⚠1	A1	Modify Data	HZF	11/25/2016
⚠0	A0	NEW RELEASE	HZF	06/27/2013