


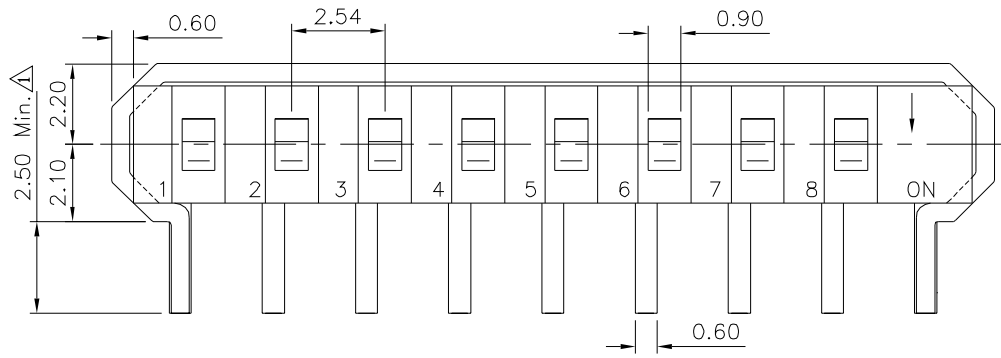
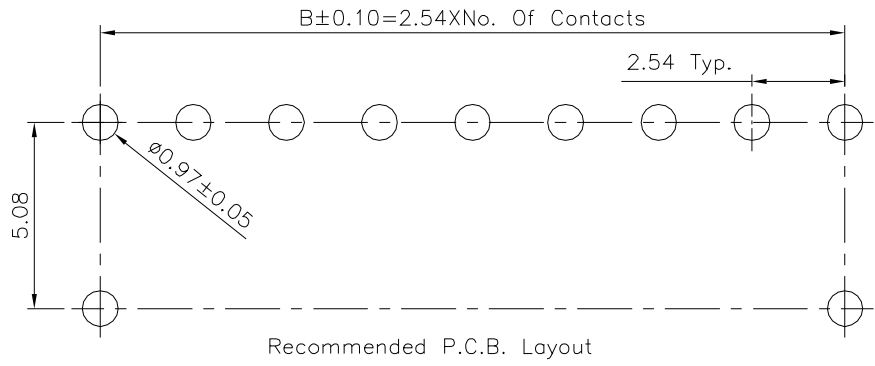
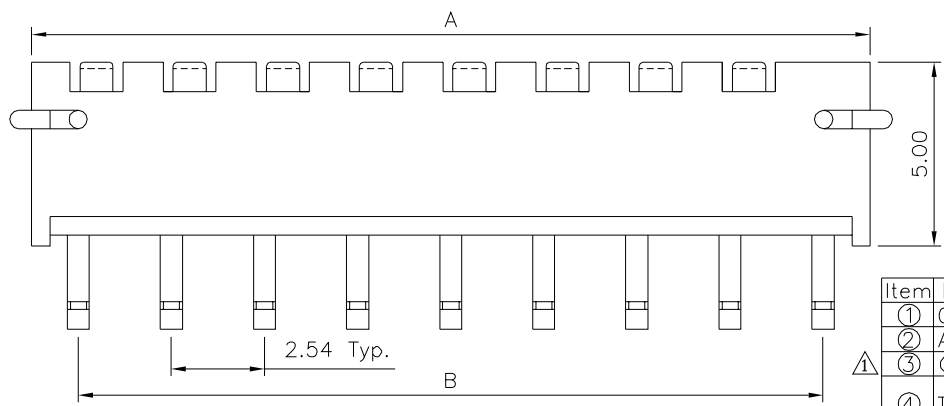


SPECIFICATION

Current Range:
 Non-Switching:100mA 50V DC
 Switching:10mA 5V DC
 Dielectric Withstanding Voltage:300V AC For One Minute
 Contact Resistance:100 Milliohms Max.(Initial)
 After Each Test Contact Resistance
 200 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 At 500V DC,60s±5s
 Operation Temperature Range:-30°C~+80°C
 Storage Temperature Range:-30°C~+80°C
 RoHS Compliant

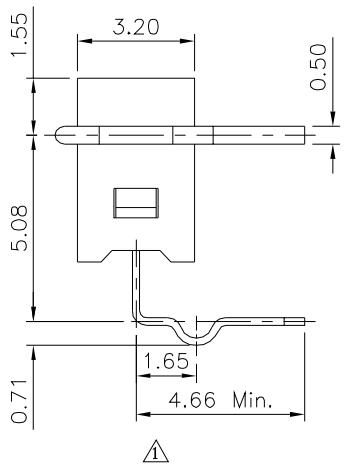

Pin	A	B
02	7.62	5.08
04	12.70	10.16
06	17.78	15.24
08	22.86	20.32
10	27.94	25.40

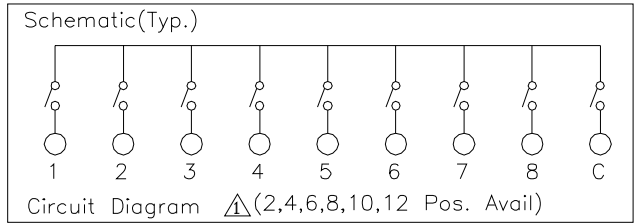

Item	Description	Q'ty	Material	Remark
①	Cover	1	PA66,UL94V-0	Black
②	Actuator	1	PA66,UL94V-0	White
③	Contact	1	Phosphor Bronze	Gold Plated Over Nickel
④	Terminal	1	Brass	Gold Plated On Contact Area,Tin Plated On Solder Tails,Over Nickel
⑤	Base	1	HTN,UL94V-0	Black
⑥	Support Pin	1	SWC	Nickel Plated

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
18114		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
.X ±0.20			
.XX ±0.20			
ANG.			
UNIT	mm		
NO.	REV.	REVISIONS	DATE
△A1		Modify Data	HZF 07/18/2018
△A0		NEW RELEASE	HZF 01/23/2015