
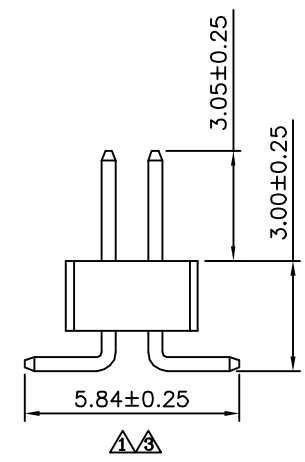
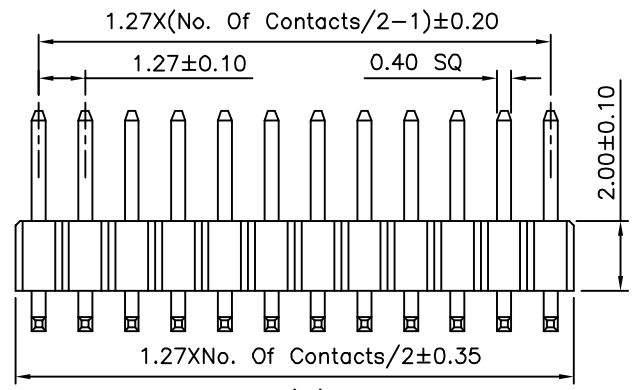


Recommended P.C.B. Layout

△△ SPECIFICATION

- Current Rating:1A
- Withstand Voltage:500V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- △ Contact:Copper Alloys,Gold Flash Over Nickel
- No. Of Contacts:04~100 Contacts
- RoHS Compliant

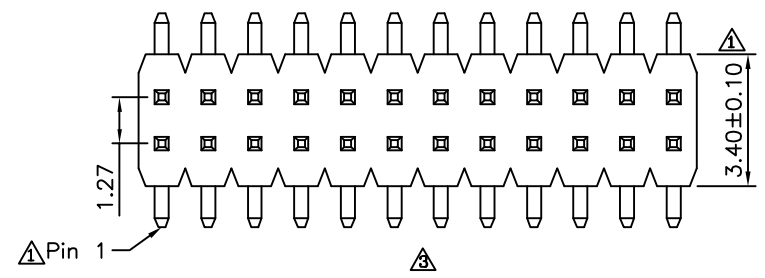

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
18790		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A3	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	12/26/2012
△ A2		Modify Data	HZF	11/30/2010
△ A1		Modify Data	HZF	10/26/2010
△ A0		NEW RELEASE	INGRID	06/06/2007