


△ SPECIFICATION
 Current Range:
 Non-Switching: 100mA 50V DC
 Switching: 25mA 24V DC
 Withstanding Voltage: 500V AC 50Hz Or 60Hz For 1 Minute
 Contact Resistance: 50 Milliohms Max. (Initial)
 Insulation Resistance: 100 Megaohms Min. At 500V DC, 60s ± 5s
△ Operation Temperature Range: -40°C ~ +85°C
Storage Temperature Range: -40°C ~ +85°C
 Operation Force: 9.8N Max.
 RoHS Compliant

Pin	A	B
02	6.44	2.54
03	8.98	5.08
04	11.52	7.62
05	14.06	10.16
06	16.60	12.70
07	19.14	15.24
08	21.68	17.78
09	24.22	20.32
10	26.76	22.86
12	31.84	27.94

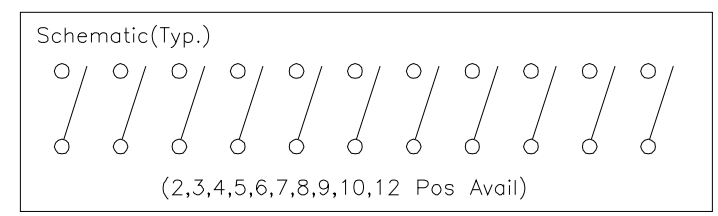

Item	Description	Q'ty	Material	Remark
①	Terminal	1	Brass	Gold Plated Over Nickel
②	Cover	1	PBT, UL94V-0	Blue
③	Stem	2~12	PBT, UL94V-0	White
④	Contact	2~12	C7035	Gold Plated Over Nickel
⑤	Base	1	PA66+20%G.F.	Black

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	△ B3 Modify Data △ B2 Modify Data △ B1 Modify Data △ B0 Modify P/N: SWXXSR-RD → SWXXSR-XX-H △ B0 NEW RELEASE NO. REV. REVISIONS	HZF 07/13/2018 HZF 08/11/2015 HZF 04/04/2014 HZF 03/14/2009 HZF 03/14/2009 CHK DATE	
20716		MEI					10mm Over ±0.20
SCALE NONE		CHECKED BY HZF					10mm Below ±0.10
REV.		DRAWING BY CYP		UNIT mm			
B3		REV. B3					