

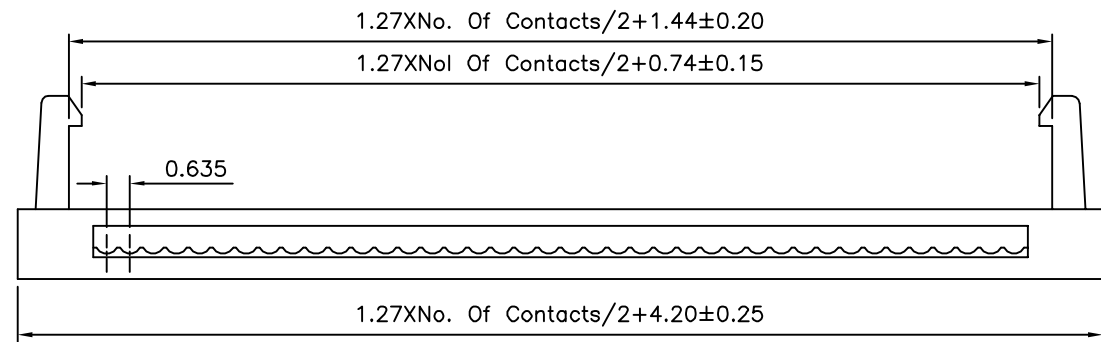



△ SPECIFICATION

Current Rating:1.0 Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 △ Contact:Phosphor Bronze,
 Selective Gold Plated Over Nickel
 RoHS Compliant

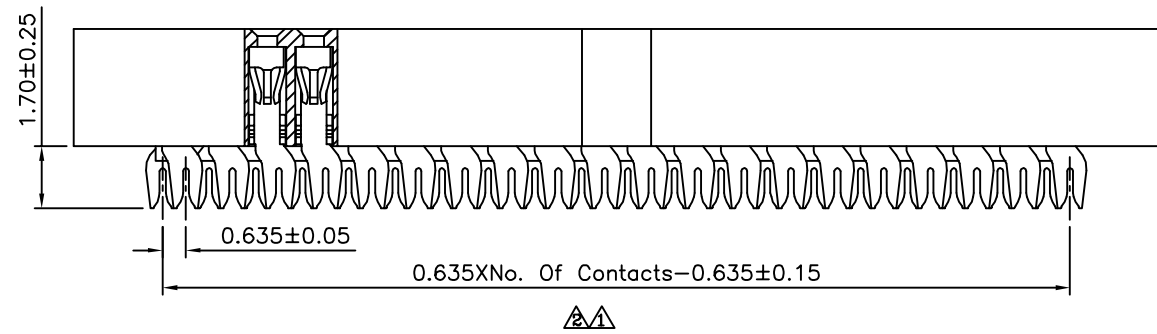

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
20947		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		YBL		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	01/20/2014
△ A1	Modify Data	HZF	04/30/2012
△ A0	NEW RELEASE	HZF	10/17/2008

