

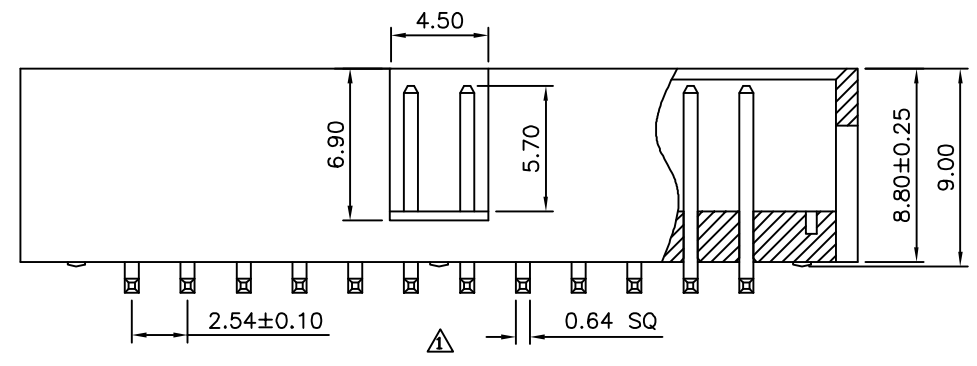


△ Recommended P.C.B. Layout  
PCB Tolerance:±0.05 (Top View)

**△ SPECIFICATION**  
 Current Rating:3 Amps  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

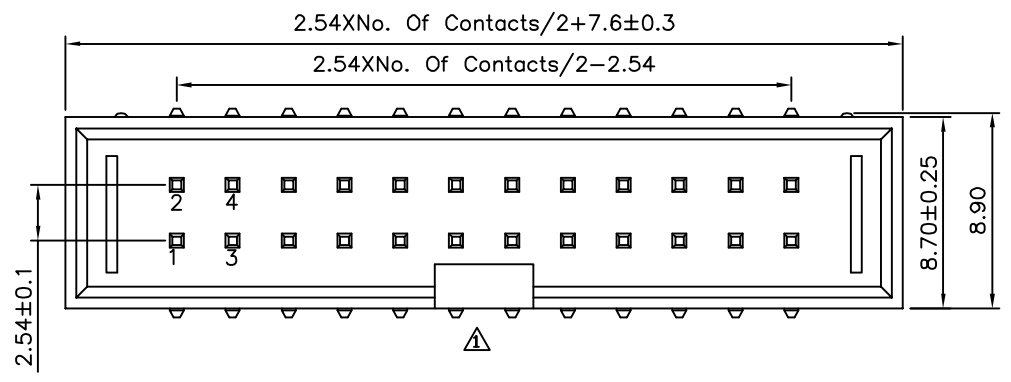

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 △.X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*
21245		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	A1	UNIT

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	01/22/2015
△ A0		NEW RELEASE	HZF	12/20/2010