
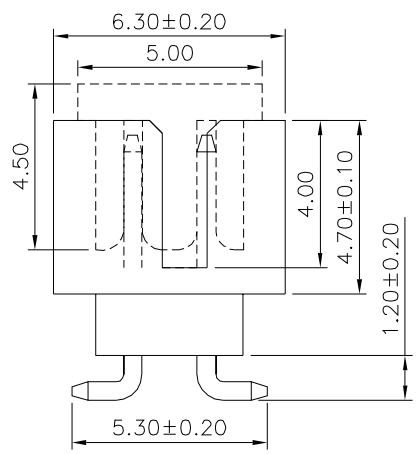
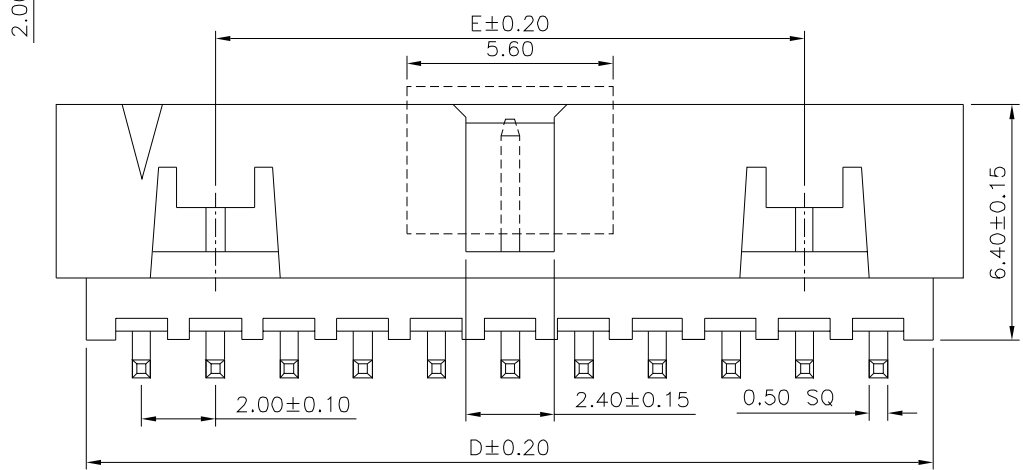
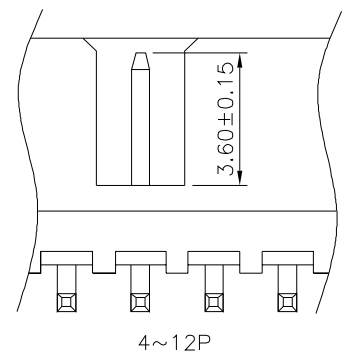


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:1.5 Amp
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstand Voltage:500V AC/Minute
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant

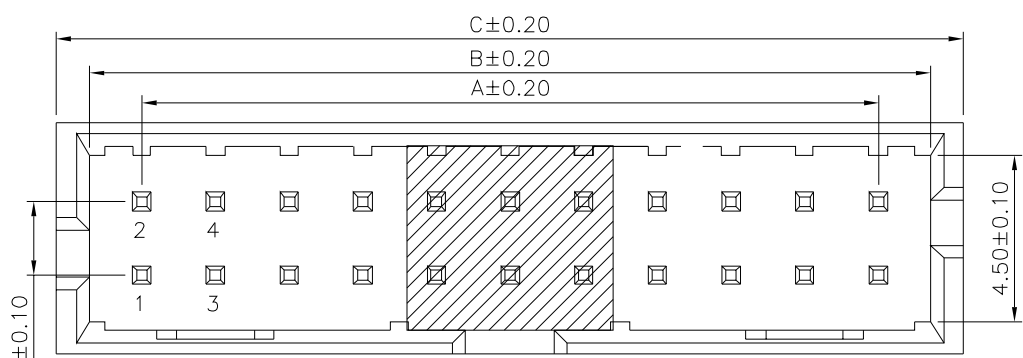

Pin	A	B	C	D	E
4	2.00	4.85	6.65	5.00	—
6	4.00	6.85	8.65	7.00	—
8	6.00	8.85	10.65	9.00	—
10	8.00	10.85	12.65	11.00	—
12	10.00	12.85	14.65	13.00	—
14	12.00	14.85	16.65	15.00	8.00
16	14.00	16.85	18.65	17.00	10.00
18	16.00	18.85	20.65	19.00	12.00
20	18.00	20.85	22.65	21.00	14.00
22	20.00	22.85	24.65	23.00	16.00
24	22.00	24.85	26.65	25.00	18.00
26	24.00	26.85	28.65	27.00	20.00
28	26.00	28.85	30.65	29.00	22.00
30	28.00	30.85	32.65	31.00	24.00
32	30.00	32.85	34.65	33.00	26.00
34	32.00	34.85	36.65	35.00	28.00
36	34.00	36.85	38.65	37.00	30.00
38	36.00	38.85	40.65	39.00	32.00
40	38.00	40.85	42.65	41.00	34.00
42	40.00	42.85	44.65	43.00	36.00
44	42.00	44.85	46.65	45.00	38.00
46	44.00	46.85	48.65	47.00	40.00
48	46.00	48.85	50.65	49.00	42.00
50	48.00	50.85	52.65	51.00	44.00

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 21657
 SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 UNIT mm

△ A0	NEW RELEASE	HZF	07/25/2018
NO. REV.	REVISIONS	CHK	DATE