
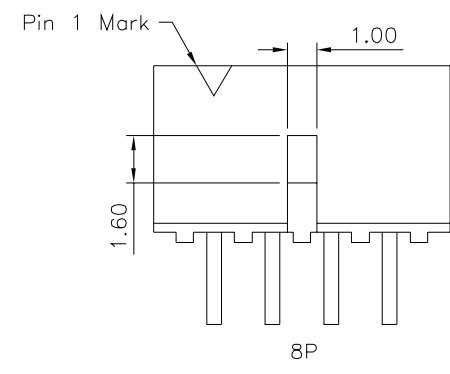
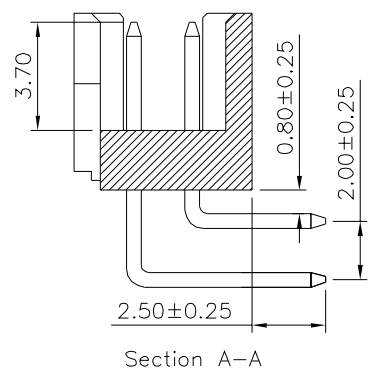
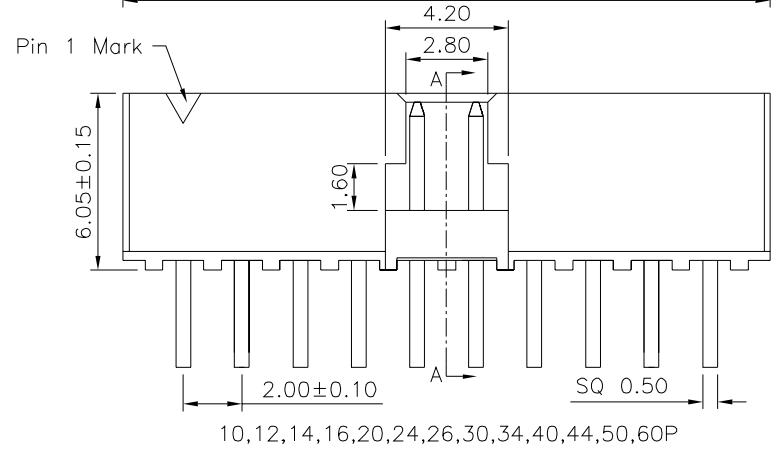


Recommended P.C.B. Layout (Top Side)  
(PCB Board Tolerance  $\pm 0.05$ )

**SPECIFICATION**  
 Current Rating: 2.0A  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Contact: Phosphor Bronze, Gold Plated Over Nickel  
 ⚠ Insulator: PA9T+30%G.F.(UL94V-0), Black  
 RoHS Compliant

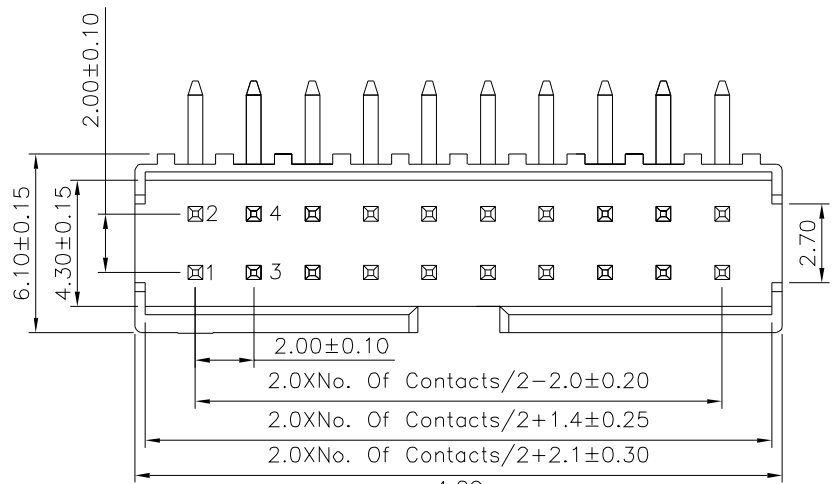

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm 0.40$ .XX $\pm 0.25$ .XXX $\pm 0.15$ ANG. $\pm 3^{\circ}$			
22764		MEI					
		CHECKED BY					
		HZF					
		DRAWING BY					
		CYP					
SCALE	NONE	REV.	A1	UNIT	mm		

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	09/27/2024
⚠ A0		NEW RELEASE	HZF	08/14/2016