

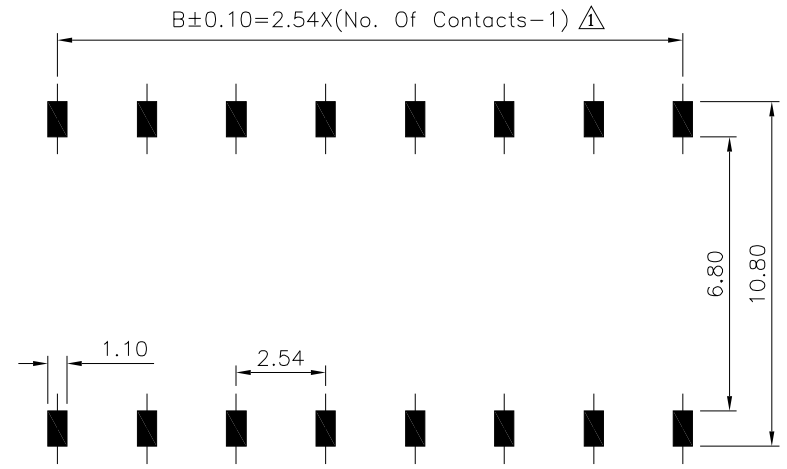
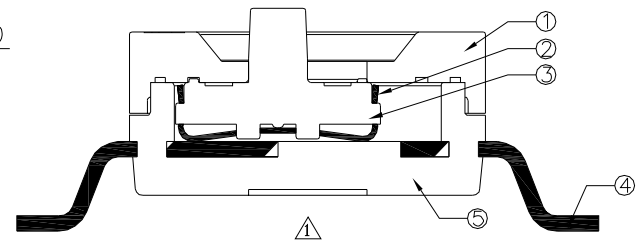


△ SPECIFICATION


Current Range:
 Non-Switching:100mA 50V DC
 Switching:25mA 24V DC
 Dielectric Withstanding Voltage:500V AC For One Minute
 Contact Resistance:100 Milliohms Max.(Initial)
 Insulation Resistance:100 Megaohms Min.
 At 500V DC,60s±5s
 Operation Temperature Range:-20°C~+85°C
 Storage Temperature Range:-40°C~+85°C
 Capacitance:5pF Max. At 1 MHz±10 KHz
 RoHS Compliant

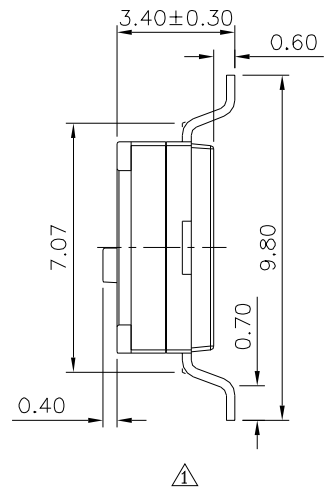

Recommended P.C.B. Layout

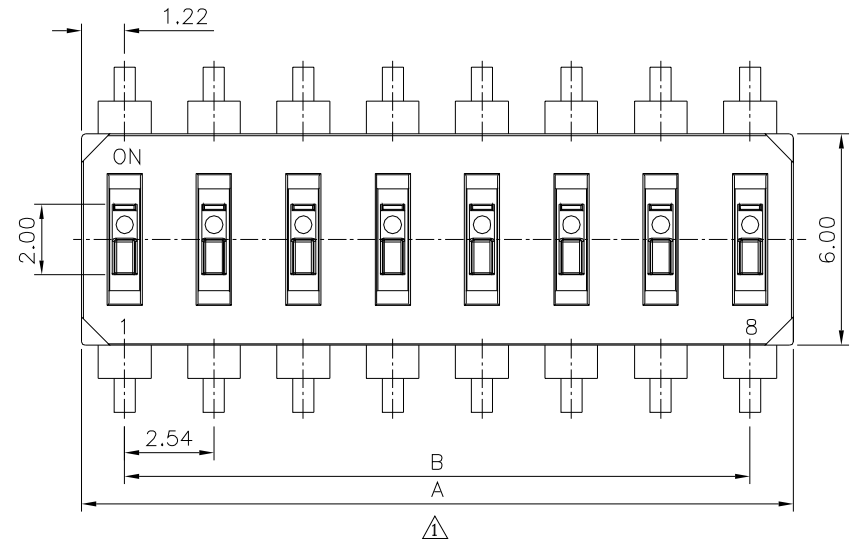

Pin	A	B
01	2.44	
02	4.98	2.54
03	7.52	5.08
04	10.06	7.62
05	12.60	10.16
06	15.14	12.70
07	17.68	15.24
08	20.22	17.78
09	22.76	20.32
10	25.3	22.86
12	30.38	27.94

Schematic(Type)

 (1,2,3,4,5,6,7,8,9,10,12 Pos. Avail)

RoHS Compliant

No.	Description	Q'ty	Material	Remark
①	Cover	1	PA9T,UL94V-0	Black
②	Contact	*	C7035	Gold Flash Over Nickel
③	Actuator	*	LCP,UL94-0	White
④	Terminal	1	Brass	Gold Flash Over Nickel
⑤	Base	1	PA9T,UL94V-0	Black

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

11137

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.20
 .XX ±0.20
 ANG.

SCALE NONE REV. A1 UNIT mm

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/27/2018
△ A0		NEW RELEASE	HZF	08/14/2013