File No.	7610D26805	SHEET	1/1

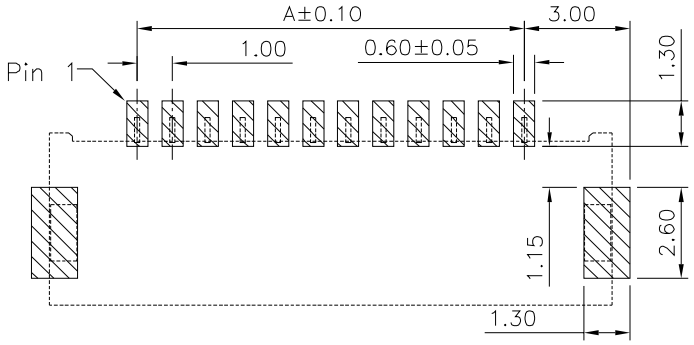

Recommended P.C.B. Layout

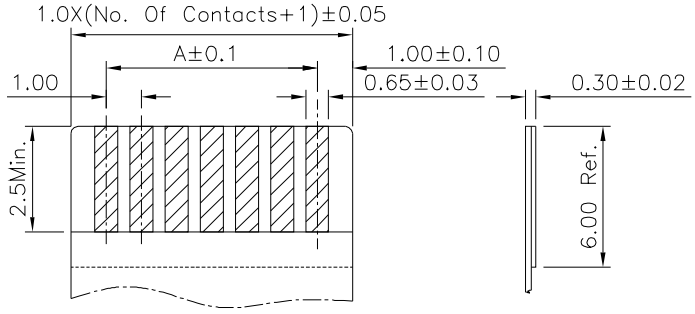

APPlicable FFC

SPECIFICATION

1.Material&Finish
Housing:LCP(UL94V-0),Nature
Contact:Phosphor Bronze,Gold Flash Over All, Over Nickel
Cover:LCP(UL94V-0),Black
Leg:Brass,Tin Plated

2.Electrical Characteristics
Current Rating:0.5A AC/DC
Voltage Rating:50V AC/DC

3.Environmental Characteristics
Temperature Range:-40°C~+105°C

4.RoHS Compliant

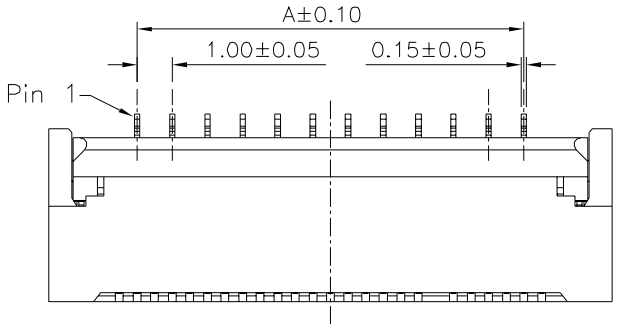

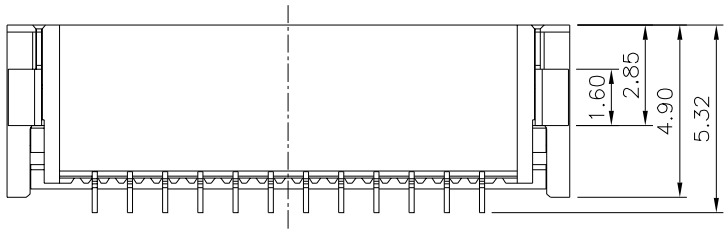

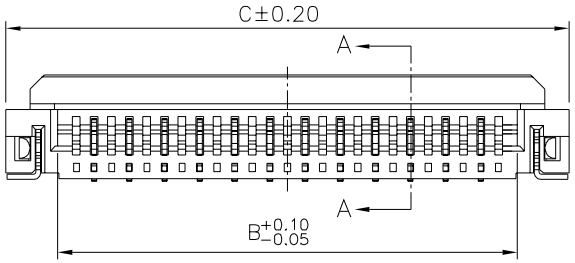





Section A-A

Pin	A	B	C	Pin	A	B	C
*4	3.00	5.05	8.00	*18	17.00	19.05	22.00
5	4.00	6.05	9.00	19	18.00	20.05	23.00
*6	5.00	7.05	10.00	*20	19.00	21.05	24.00
*7	6.00	8.05	11.00	21	20.00	22.05	25.00
*8	7.00	9.05	12.00	*22	21.00	23.05	26.00
9	8.00	10.05	13.00	23	22.00	24.05	27.00
10	9.00	11.05	14.00	24	23.00	25.05	28.00
11	10.00	12.05	15.00	25	24.00	26.05	29.00
12	11.00	13.05	16.00	26	25.00	27.05	30.00
13	12.00	14.05	17.00	27	26.00	28.05	31.00
14	13.00	15.05	18.00	28	27.00	29.05	32.00
15	14.00	16.05	19.00	29	28.00	30.05	33.00
16	15.00	17.05	20.00	*30	29.00	31.05	34.00
*17	16.00	18.05	21.00				

Note:The Mark Of "*" Are Tooled

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	22663		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	LSM		
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.5
.XX ±0.25
.XXX ±0.15
.XXXX ±0.1
ANG. ±2°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	10/26/2023